


CRYSTORAMA

LIGHTING THE WAY FOR SIXTY YEARS

ASSEMBLY INSTRUCTION MODEL#2246-BF

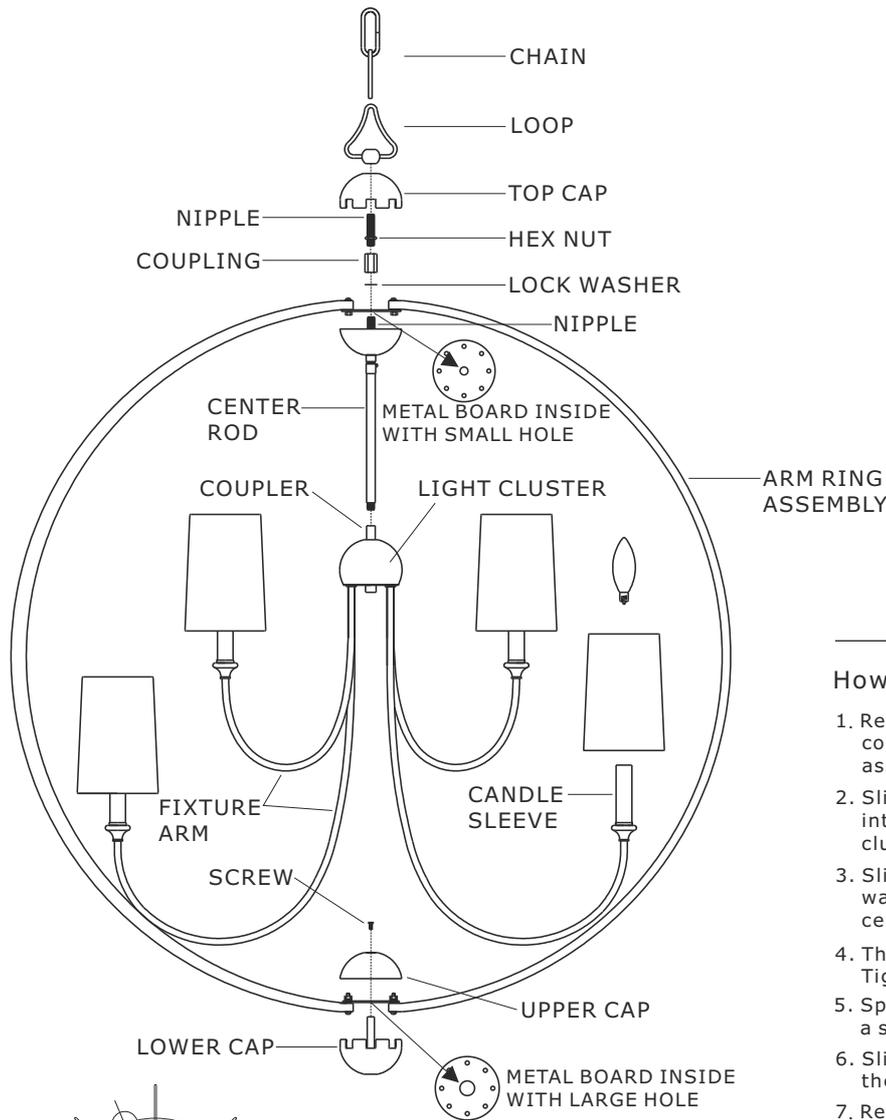


All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.





You will need 8- Candelabra Base Bulb
40 Watts Recommended 60 Watts Max.
USE LED BULBS FOR EXTENDED USE
This fixture is Dry rated

How to install

1. Remove the top cap, the nipple, the hex nut, the coupling, and the lock washer from the center rod assembly by loosening the loop.
2. Slip the center rod assembly along wire and thread into the coupler located on the top of the light cluster.
3. Slip the top hole of the arm ring assembly and lock washer over the nipple located on the top of the center rod assembly, then secure with the coupling.
4. Thread the nipple onto the coupling and adjust. Tighten it with hex nut.
5. Spread the fixture arms and arm ring assembly to a suitable position.
6. Slip the top cap over the nipple, then secure with the loop.
7. Remove the top upper cap from the lower cap assembly by loosening the screw.
8. Put the lower cap through the bottom hole of the arm ring assembly, secure the upper cap onto the lower cap with the screw.
9. Install the fabric shade onto the candle sleeve.
10. Install the bulbs(not included) into the socket.



SPREAD THE FIXTURE ARM AND ARM RING TO A SUITABLE POSITION

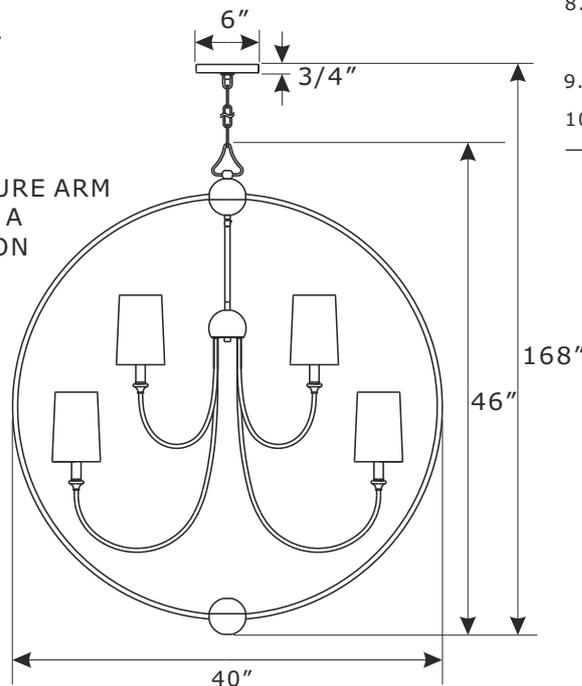

WARNING: This product can expose you to Lead which is known to the state of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.P65Warnings.ca.gov

CRYSTORAMA

LIGHTING THE WAY FOR SIXTY YEARS

ASSEMBLY INSTRUCTION MODEL #2246-BF

Part Number

Part Numbers

- A. (1)-Mounting hardware
- B. (1)-Canopy W6''xH3/4'' #XRF2240BFCAN6IN
- C. (1)-Collar ring
- D. (1)-Collar loop
- E. (1)-Chain -120'', 4mm thick #XRF2246BFCHAIN4MM
- F. (1)-Loop #XRF2240BFLOOP
- G. (1)-Top cap
- H. (1)-Center rod assembly
- I. (1)-Arm ring assembly
- J. (8)-Fabric shade W4-1/2''xH6-1/2'' #XRF2241SHA6.5IN
- K(A). (8)-Candle sleeve-BF W7/8''xL3-3/8'' #XRF2241BFCDL3.375IN
- K(B). (8)-Candle sleeve-WH W7/8''xL3-3/8'' #XRF2241WHCDL3.375IN
- L. (1)-Lower cap
- M. (1)-Screw

