


CRYSTORAMA

LIGHTING THE WAY FOR SIXTY YEARS




Crystorama.com

ASSEMBLY INSTRUCTION MODEL # 5126-AW




All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes



You will need 6-Candelabra Base Bulb
40 Watts recommended 60 Watts Max.

USE LED BULBS FOR EXTENDED USE

The fixture is Damp rated

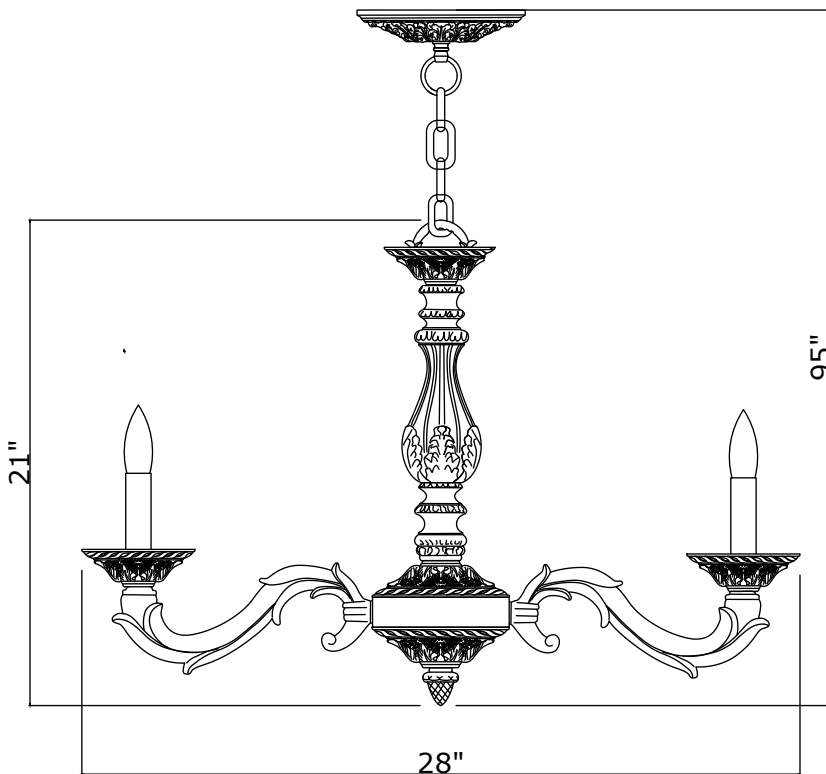

HOW TO INSTALL:

Place the fixture parts on a soft cloth-covered platform before installation of fixture.

1. Attach the mounting plate onto the outlet box.
2. Screw the center column kit onto the fixture body kit using the coupling and finial.
3. Place the candle sleeve over the socket.
4. Decide the desired hanging height and adjust the chain to the correct length.
5. Raise the fixture up and do the wire connection. Attach the canopy over the mounting bar and secure with loop and ball nuts.

⚠ WARNING: This product can expose you to Lead, which is known to the State of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.p65warnings.ca.gov

CRYSTORAMA

LIGHTING THE WAY FOR SIXTY YEARS




Crystorama.com

PART NUMBER MODEL# 5126-AW

Part Number

Part Numbers

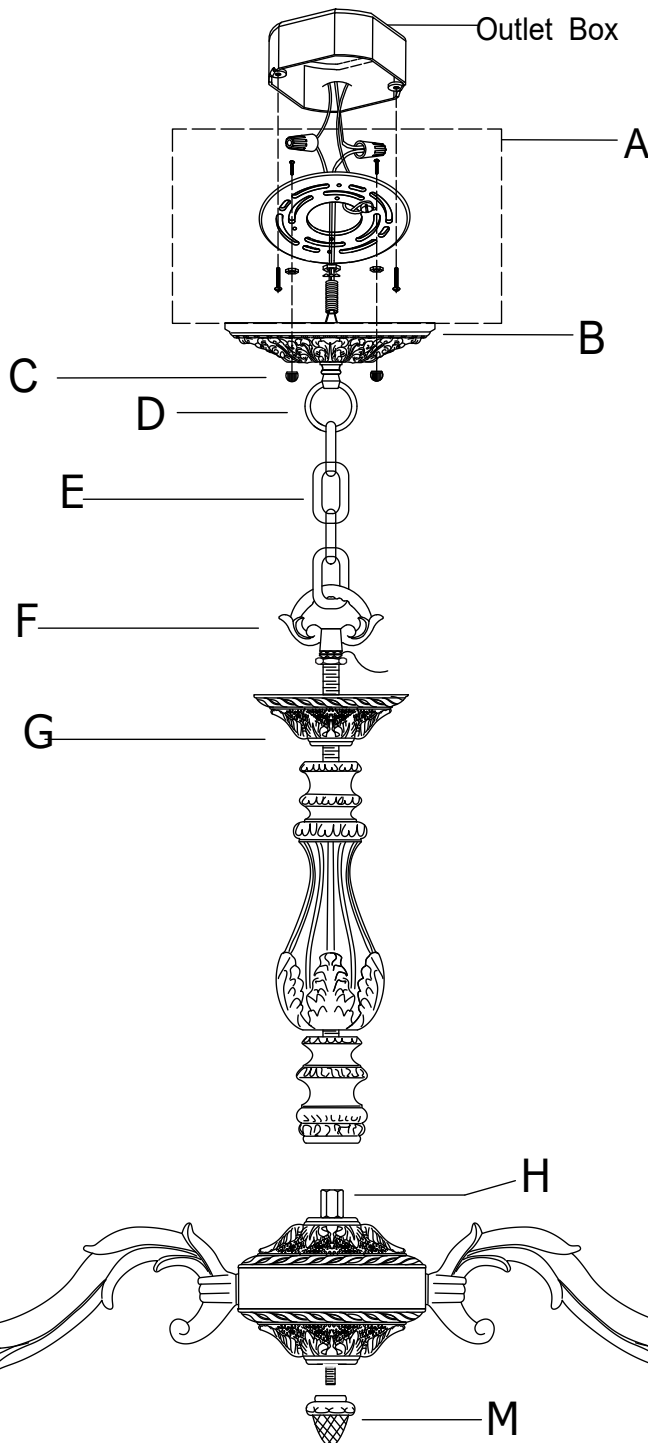

- A. (1)-Mounting hardware
Wire connector x2.
Mounting plate x1.
Lock washer x1.
Hex nut x3.
Threaded nipple x1.
Screw x4.
- B. (1)-Canopy (W5"xH1")-XSN5024AWCAN5IN
- C. (2)-Ball nut
- D. (1)-Loop-XSN5024AWTOLOOP
- E. (1)-Chain (4mmx72")-XSN5026AWCHA4MM
- F. (1)-Center column kit loop-XSN5026AWBOLOOP
- G. (1)-Center column kit
Threaded nipple ; H12 3/8"
Top bobèche ; Ø4" ; no pin ; 10.3mm center hole
-XSN5124BOB3.375IN

Vase ; H8 1/4"
Metal part ; H3 3/4"
- H. (1)-Fixture body kit
Coupling
Distributor box cover x2 ; Ø5" ; 10.3mm center hole
Distributor box ; Ø5"
- I. (6)-Metal Candle sleeve ; H4 1/8"-XSN5026AWCDL4.125IN
- J. (6)-White PVC Candle sleeve-XSN5026WHCDL4.125IN
- K. (6)-Bobèche ; Ø4" ; no pin ; 10.3mm center hole
-XSN5124BOB3.375IN
- L. (6)-9.5"Arm
- M. (1)-Finial-XSN5024AWFIN