


# CRYSTORAMA



LIGHTING THE WAY FOR SIXTY YEARS


## ASSEMBLY INSTRUCTION MODEL #1155-CH-CL-MWP

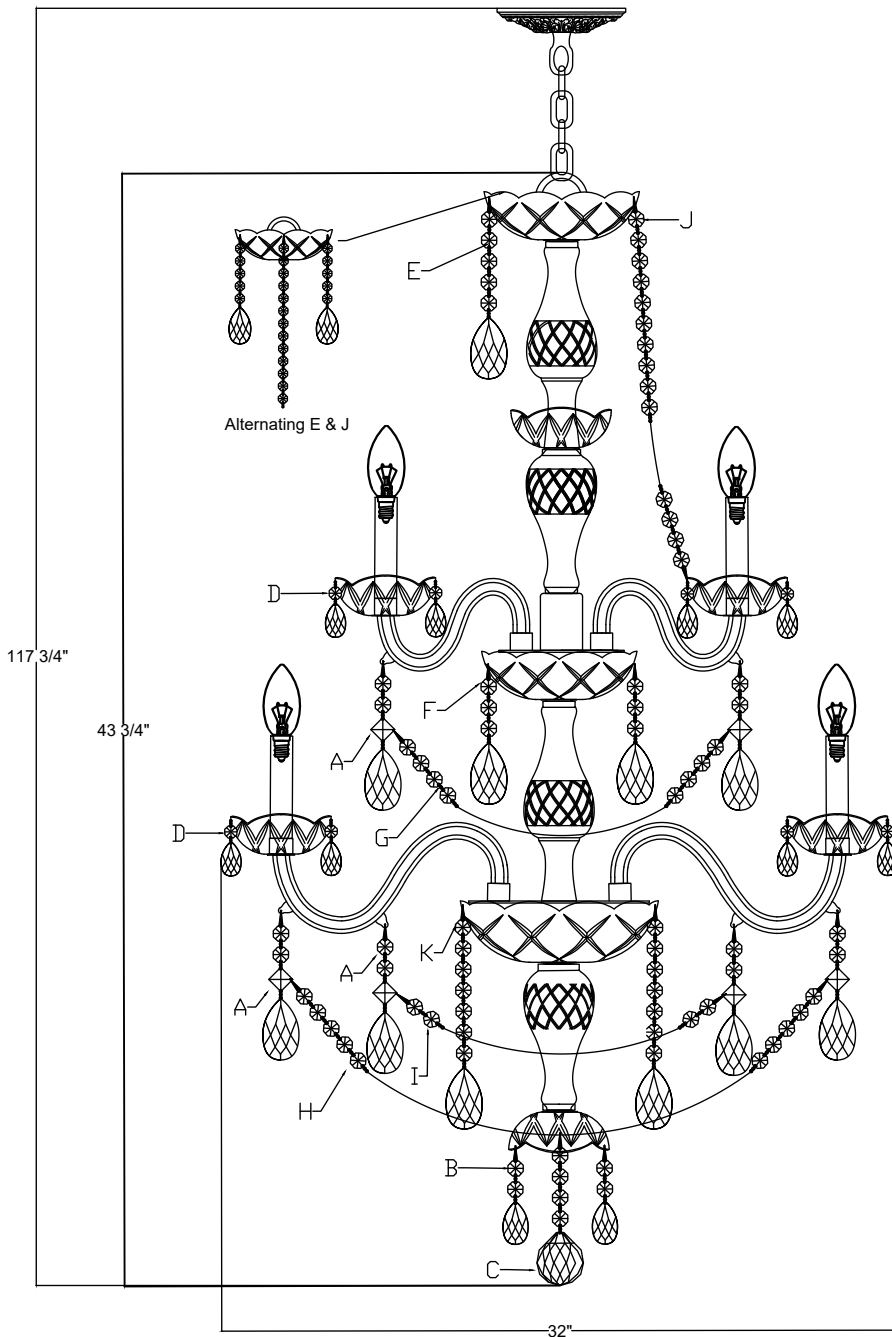

### WARNING:




Electrical Danger



Turn Power Off

All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.



You will need 15- Candelabra Base Bulb

40 Watts recommended 60 Watts Max.

USE LED BULBS FOR EXTENDED USE

The fixture is Damp rated

### HOW TO INSTALL:

Place the fixture parts on a soft cloth-covered platform before installation of fixture.

- To install the upper arms, slightly loosen each screw on the metal plate. Pull a female plug through a hole in the upper metal plate. Connect the male plug at the end of the upper arm with the female plug that was just pulled. Push the end of the arm with the metal tab through the hole until stopped by the metal tab (this should also push the wires and plugs back inside the metal plate). Twist the metal tab counter-clock wise until both inserts lock onto the loose screws. Tighten the screw securing the arm in place. Repeat for all upper arms.
- Repeat Step1 for the lower arms.
- Place the bottom bowl, metal washer, check ring, coupling, Glass vase, check ring, metal washer, bottom bobèche, metal washer, in that order, over the distributor box-2. Secure with the Finial.
- Screw the Center column kit 1 onto the center column kit 2.
- Attach the mounting bar onto the outlet box.
- Decide the desired hanging height and adjust the chain to the correct length.
- Raise the fixture up and do the wire connection. Attach the canopy over the mounting bar and secure with collar ring.
- Dress the crystals as illustrated.

### Crystal Sets

- A. 25 Sets. (2)14mm + (1) Square + AS9-2.5"
- B. 5 Sets. (2)14mm + AS9-2"
- C. 1 Piece. (4)14mm + AS8-50mm Ball
- D. 60 Sets. (1)14mm + AS9-2"
- E. 5 Sets. (5)14mm + AS9-2.5"
- F. 10 Sets. (3)14mm + AS9-2.5"
- G. 5 Sets. (11)14mm
- H. 10 Sets. (10)14mm
- I. 10 Sets. (6)14mm
- J. 5 Sets. (17)14mm
- K. 10 Sets. (7)14mm + AS9-2.5"

**⚠ WARNING:** This product can expose you to Lead, which is known to the State of California to cause cancer and/or birth defects or reproductive harm. For more information go to [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)


# CRYSTORAMA



LIGHTING THE WAY FOR SIXTY YEARS

## ASSEMBLY INSTRUCTION MODEL #1155-CH-CL-MWP

### Part Number

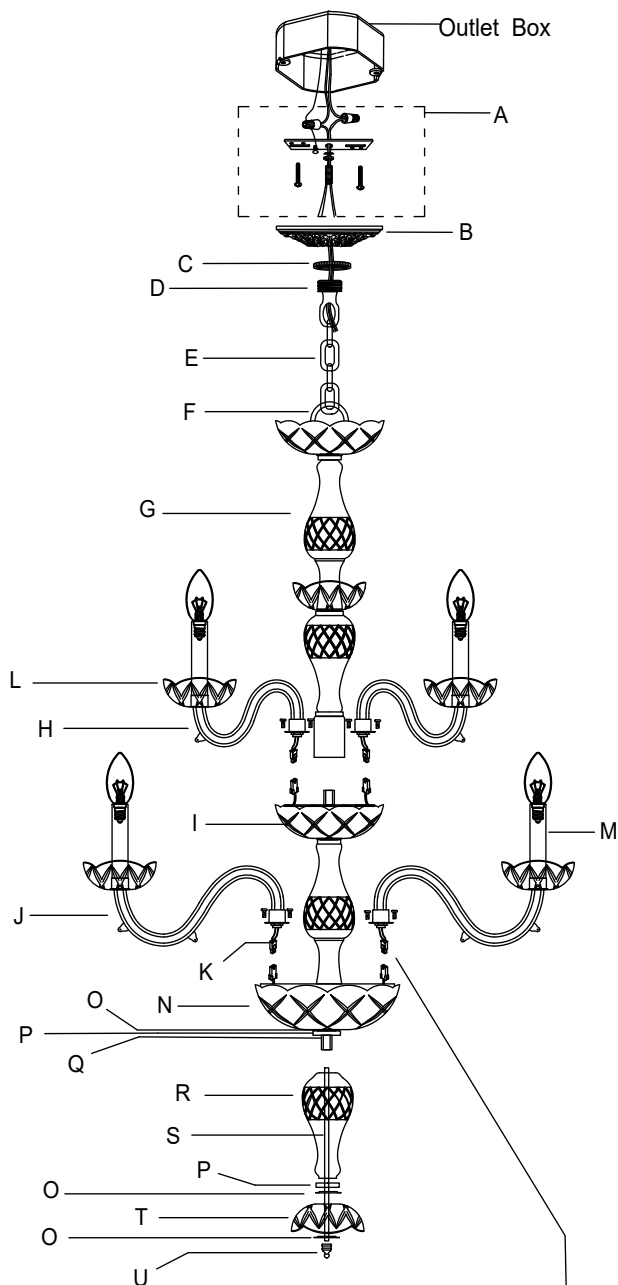

#### Part Numbers

- A. (1)-Mounting hardware  
Wire connector x 2.  
Mounting bar x 1.  
Lock washer x 1.  
Hex Nut x 1.  
Nipple x 1.  
Screw x 2.
- B. (1)-Canopy (W5"xH1")-XSN1155CHCAN5IN
- C. (1)-Collar Ring
- D. (1)-Collar Loop-XSN1155CHLOOP1
- E. (1)-Chain (4mmx72")-XSN1155CHCHA4MM
- F. (1)-Center Column Kit Loop-XSN1155CHLOOP2
- G. (1)-Center Column Kit 1  
Top Bowl ; Ø6",10pin,11mm center hole.  
Glass Vase; H8"  
Top Bobeche ; Ø4", no pin,24mm center hole.  
-XSN1155BOB4IN  
Glass Vase x 1 ; H6"  
Metal Cover ; H1.5"
- H. (5)-6"upper Arms with holder-XSN1155CHARM6INKD
- I. (1)-Center Column Kit 2  
Glass Bowl ; Ø6",10 pin,11mm center hole.  
Distributor Box-1; Ø4 7/8 " ; 11mm center hole ;  
with female plug.  
Glass Vase; H8"  
Distributor Box-2; Ø7 1/8" , 11mm center hole ;  
with female plug.
- J. (10)-12" lower Arms with holder-XSN1155CHARM12INKD
- K. (15)-Male Plug
- L. (15)-Bobeche; Ø4",4 pin,24mm center hole.  
-XSN1155CHBOB4PN
- M. (15)-PVC Candle Sleeve
- N. (1)-Bottom Bowl ; Ø8",10 pin,11mm center hole.
- O. (3)-Metal washer
- P. (2)-Check Ring
- Q. (1)-Coupling
- R. (1)-Glass Vase; H6"
- S. (1)-Thread pipe
- T. (1)-Bottom Bobeche; Ø4",5 pin,24mm center hole.  
-XSN1155CHBOB5PN
- U. (1)-Finial-XSN1155CHF1N

