





ASSEMBLY INSTRUCTION MODEL # 525-SA CEILING

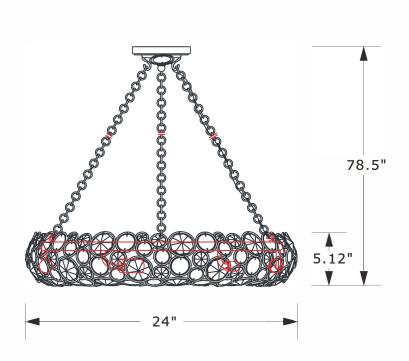

SEMI FLUSH

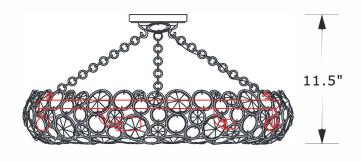

Crystal Sets

50mm 24PCS


40mm 9 PCS

30mm 12PCS

Capiz Shell Sets

40mm 102PCS

D= (°) 30mm 99 PCS



All electrical components must be

installed by a licensed electrician

in accordance with the National

Electric Code and the appropriate

local electrical codes.





You will need 6 -Candelabra Base Bulb

40 Watts Recommended 60 Watts Max.

USE LED BULBS FOR EXTENDED USE

THE FIXTURE IS DAMP RATED


How to install

- 1. Determine the preferred hanging height and adjust the chain accordingly.
- 2. Take one hanging chain. Hang one end onto the hook under the canopy and hang the other end onto the hook inside the frame. Repeat for the other two chains.
- 3. Weave the fixture wire through one of the hanging chains and through the canopy.
- 4. Install the mounting bar onto the outlet box.
- 5. Raise the fixture up and do the wire connection. Place the decorative cover over the canopy and secure with hex nut and cap nut.





ASSEMBLY INSTRUCTION MODEL # 525-SA_CEILING

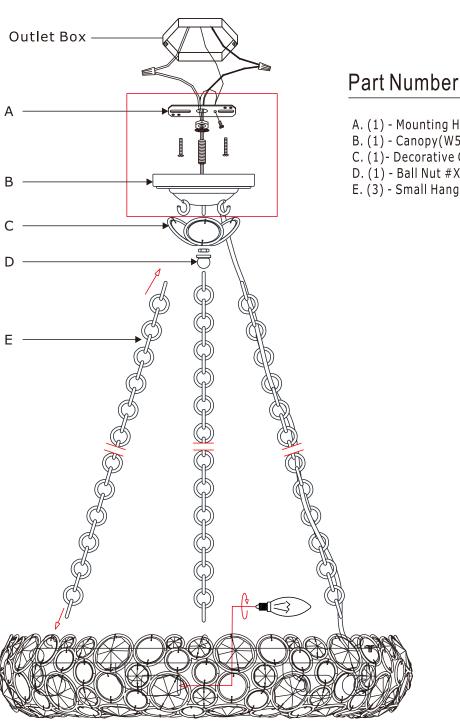

- A. (1) Mounting Hardware B. (1) Canopy(W5.1",H1.7") XRE525SACAN5.1IN
- C. (1)- Decorative Cover
- D. (1) Ball Nut #XRE525SABANUT
- E. (3) Small Hanging Chain(72"3mm) #XRE525SACHA3MM