

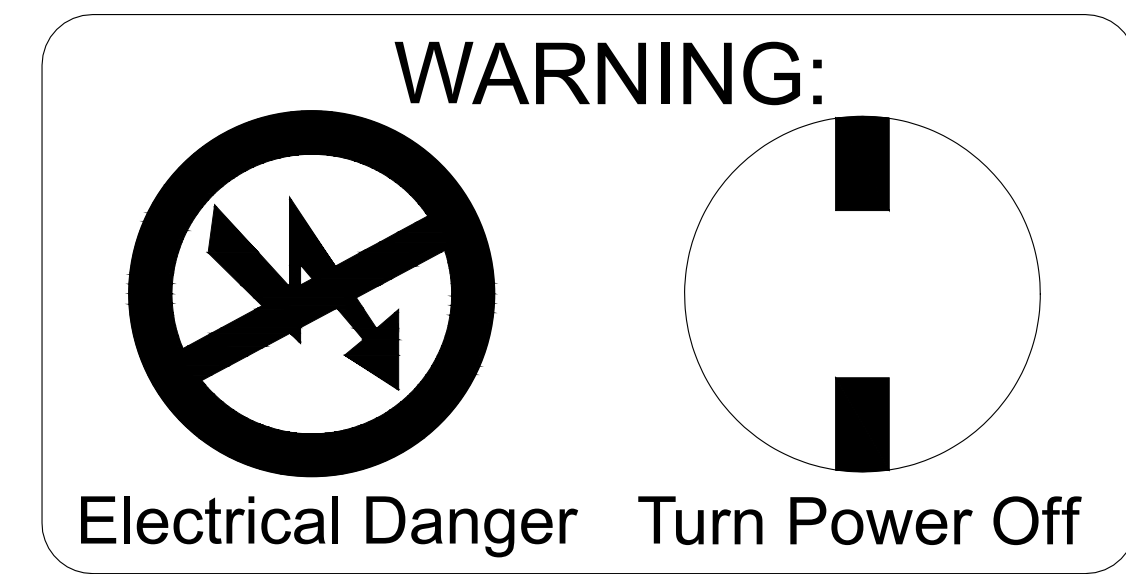
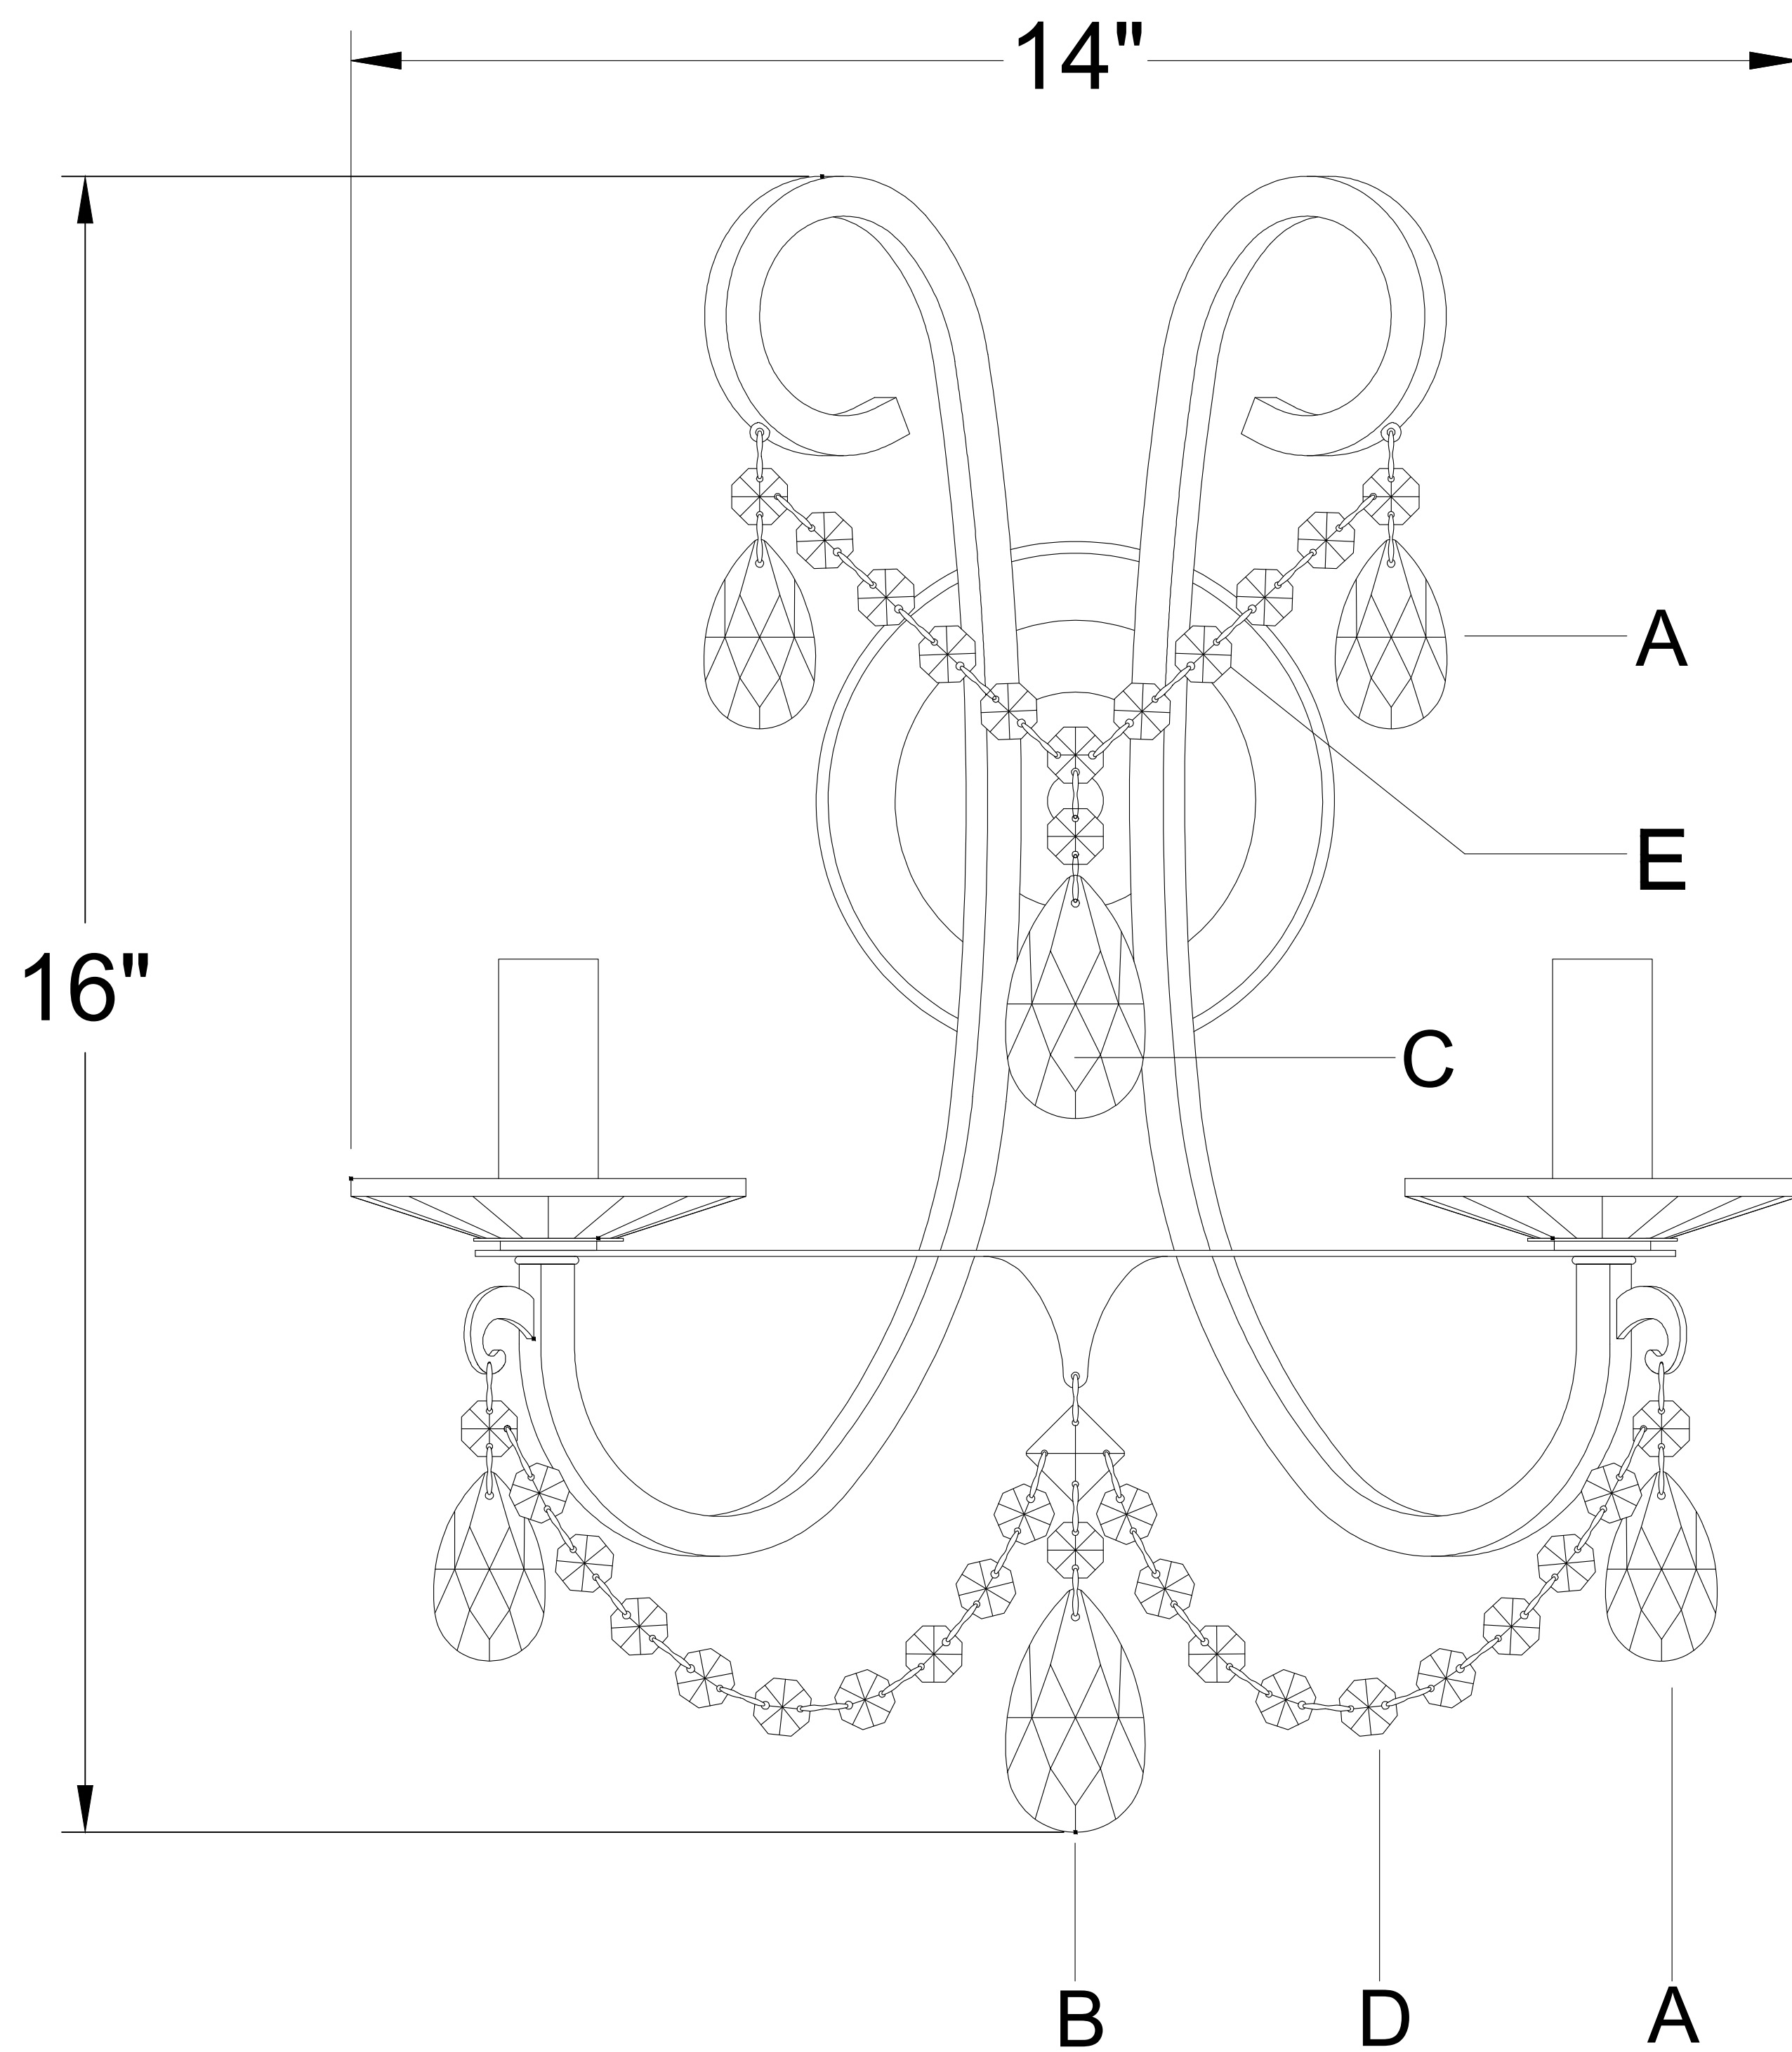


ASSEMBLY INSTRUCTION MODEL #6822-VG-CL-MWP

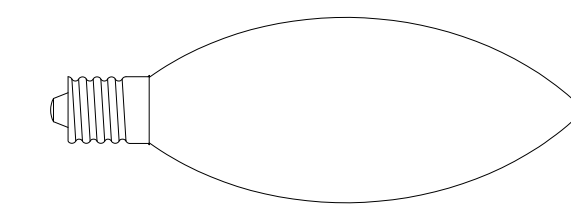

All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.

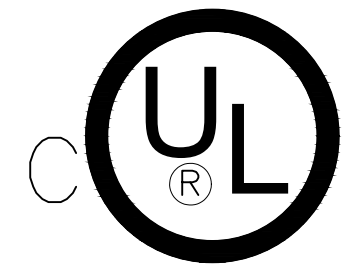

You will need 2-Candelabra Base Bulb
40Watts Recommended 60 Watts Max.







USE LED BULBS FOR EXTENDED USE
The fixture is damp rated

How to Install

1. Do a complete inventory of all parts and components before you start installing
2. After safely attaching the fixture into the outlet box, install bobeches, bulbs and proceed to connecting the power.
3. When you begin to dress the fixture, start with packet labeled (A)
4. **IMPORTANT:** Apply crystal sets in alphabetical order

Crystal Sets

- A. (14mm-3holes+50mm)x4sets
- B. (Square+14mm+63mm)x1set
- C. (14mm+63mm)x1set
- D. (14mmx9pcs)x2sets
- E. (14mmx4pcs+14mm-3holes+14mmx4pcs)x1set

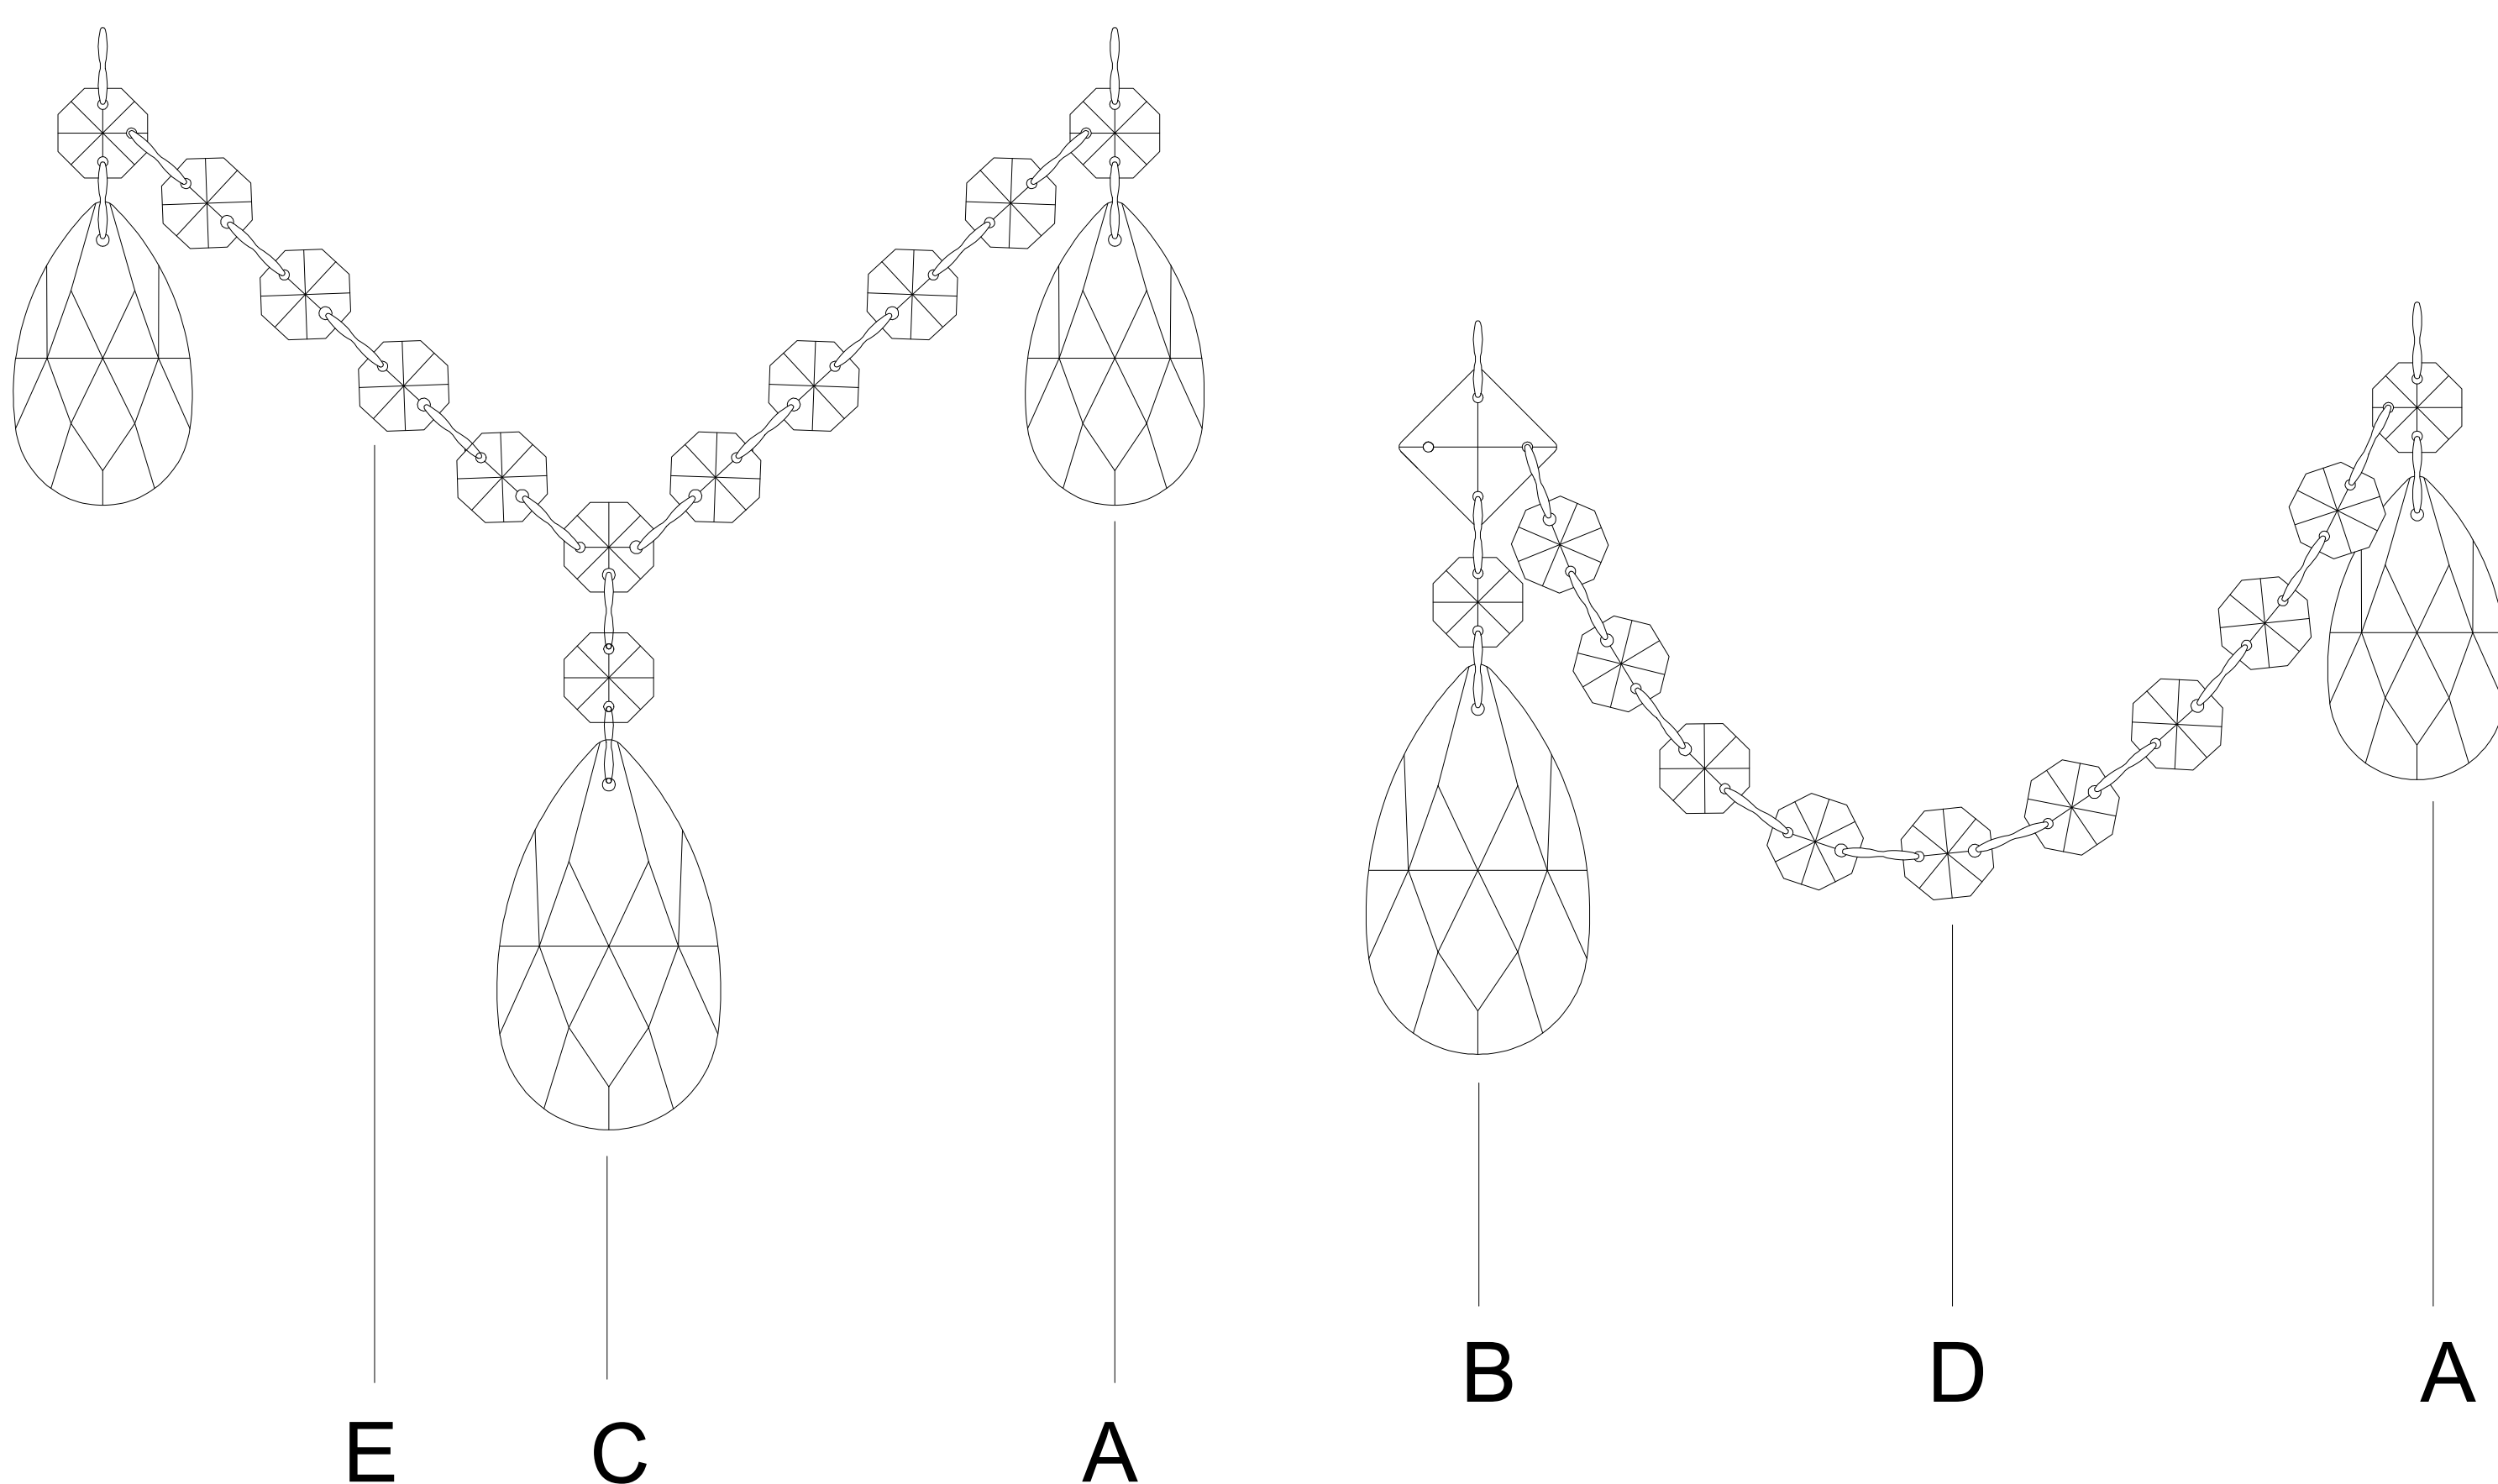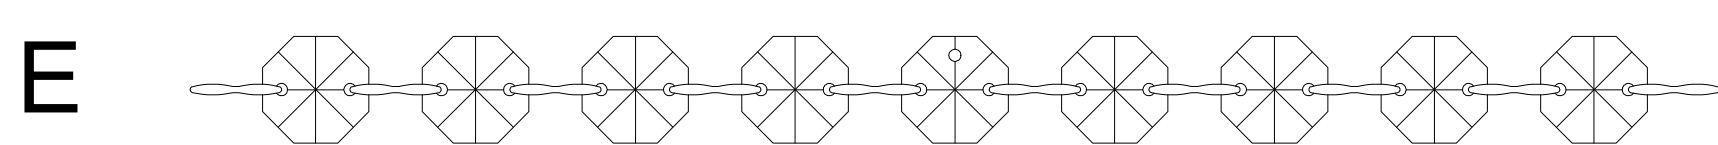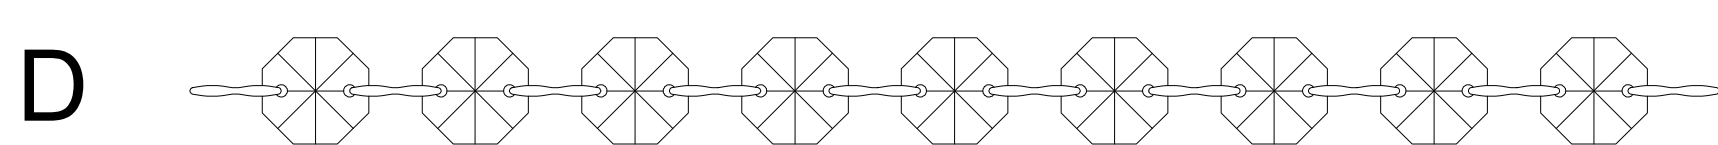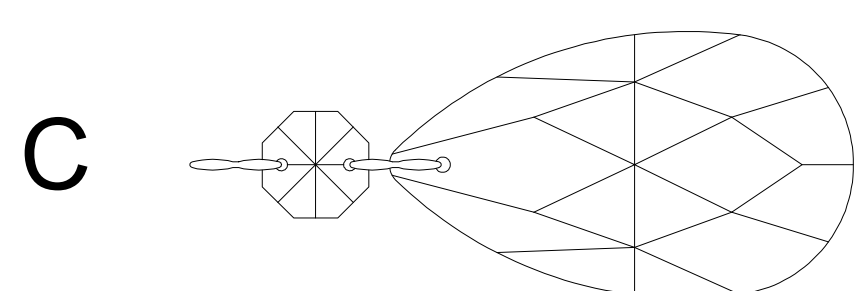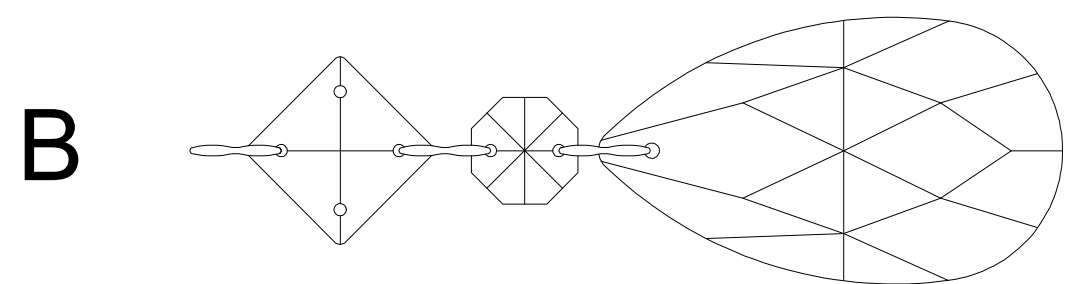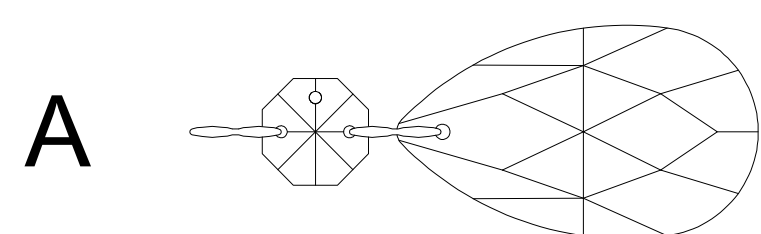



Part Number

Part Numbers

- A. (1)-Ground Screw
- B. (1)-Nipple
- C. (1)-Mounting Plate
- D. (2)-Outlet Box Screws
- E. (3)-Wire Connector
- F. (2)-Bobèche (D3.9" x Hole:1") XEH6623VGBOB4IN
- G. (2)-Metal Sleeve (H2.75") XEH6623VGMCDL2.75IN
- H. (2)-Plastic Sleeve (H2.75") XEH6623VGPCDL2.75IN
- I. (1)-Ball Nut XEH6623VGBANUT
- J. (1)-Frame

