


LIGHTING THE WAY FOR SIXTY YEARS


ASSEMBLY INSTRUCTION MODEL #7412-BU

IMPORTANT: FOR A SAFE AND SECURE INSTALLATION, THESE FIXTURES MUST BE INSTALLED BY MEANS OF SUPPORTS THAT ARE INDEPENDENT OF THE OUTLET BOX.



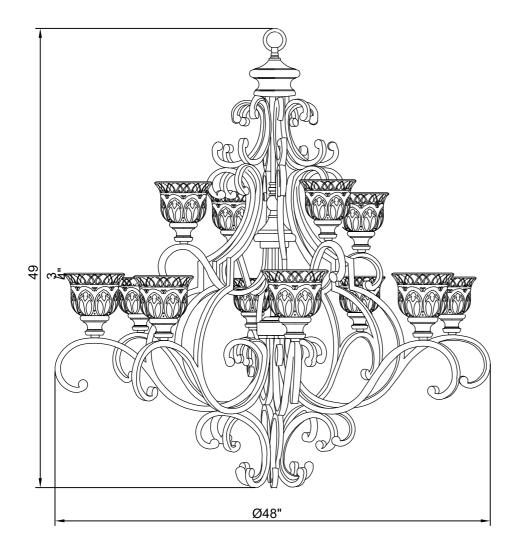

All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.



You will need 12 - Medium Bulb 40 Watts Recommended 60 Watts Max. USE LED BULBS FOR EXTENDED USE This fixture is Dry Rated.

How to Install


- 1. Adjust each arm until they are at an equal distance from one another.
- 2. Screw nipple into coupling **on top of** fixture and secure with nut.
- 3. Place cap over nipple and secure with nut and loop.
- 4.Pass longer threaded pipe through the outlet box and attach it to ceiling joist and secure it with nut.
- 5. Slide collar ring and canopy over chain. Thread screw collar onto the nipple.
- Connect chain to the screw collar with quick link. Connect chain to the loop with another quick link.
- 7. Feed wires and safety cable up through chain and pass wires through holes in screw collar, exiting through the side of hickey.
- 8. Feed the safety cable through the lock and coil it around the hickey twice, using a circular motion. Then feed the cable through the lock again and tighten it down with the lock screw. Continue to run the cable through the top of the outlet box and secure it to a supporting ceiling joist or a structural member.
- Connect the fixture wires to the supply wires.
- 10. Secure canopy with screw collar ring.
- 11. Place glass over socket and secure with ring.
- 12. Install the bulb (Not included) in accordance with the fixture's specifications. (DO NOT EXCEED THE MAXIMUM WATTAGE RATING!)

CRYST®RAMA



LIGHTING THE WAY FOR SIXTY YEARS

PART NUMBER MODEL #7412-BU

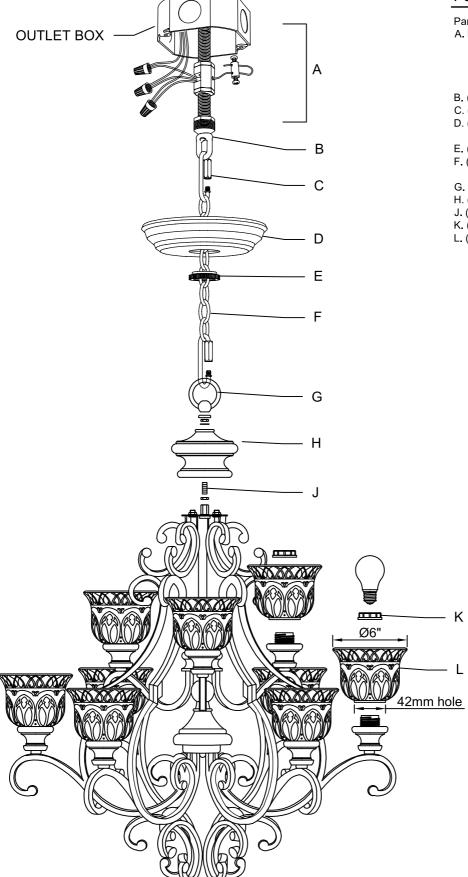

Part Number

Part Numbers

- A. Mounting Hardware
 - (3) Wire connector
 - (2) Nipple; 2"
 - (1) Hickey
 - (1) Safety Cable Lock
- B. (1) Screw Collar
- C. (2) Quick Link
- D. (1) Canopy; Ø5.25" x 1"H; XVE7409BUCAN5.25IN
- E. (1) Collar Ring
- F. (1) Chain; Ø5.5mm x 72"; XVE7409BUCHA5.5MM
- G. (1) Loop
- H. (1) Cap;
- J. (1) Nipple;
- K. (12) Ring
- L. (12) Glass Ø6" 42mm hole; XVE7401BUGLA4.5IN