



CRYSTORAMA


LIGHTING THE WAY FOR SIXTY YEARS



ASSEMBLY INSTRUCTION MODEL #ACK-921-AG

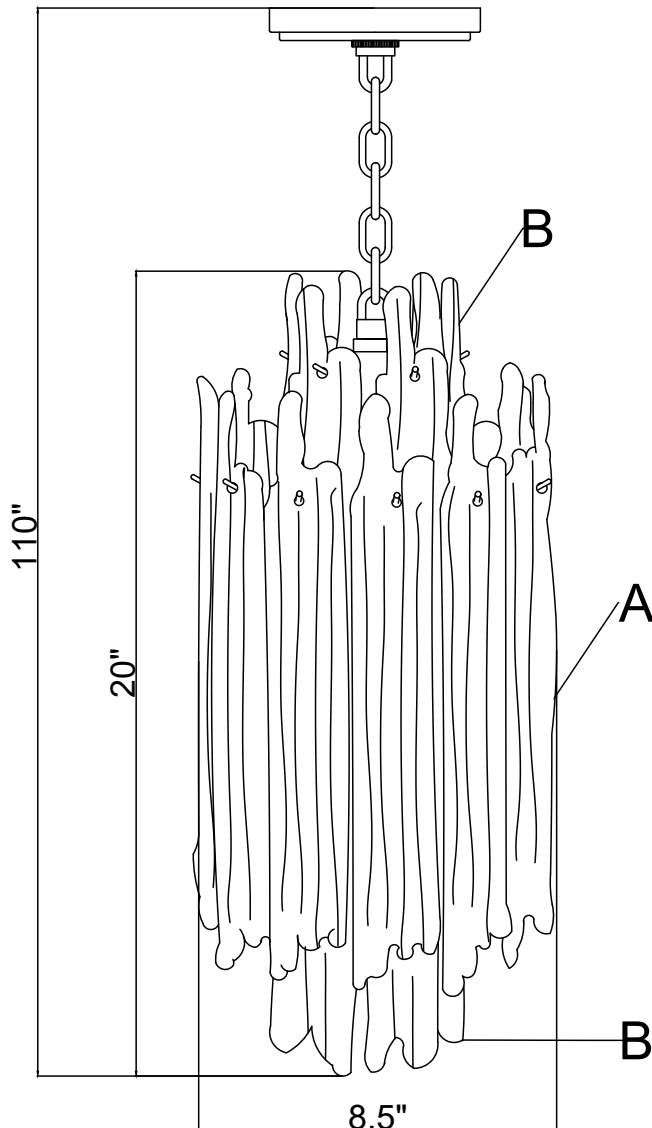

All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes



You will need 1- Medium Base Bulb
60 Watts recommended 100 Watts Max.

USE LED BULBS FOR EXTENDED USE

The fixture is Damp rated

HOW TO INSTALL:

Place the fixture parts on a soft cloth-covered platform before installation of fixture.

1. Attach the mounting bar onto the outlet box.
2. Feed the wire through threaded pipe and decorative rod and screw the threaded pipe into the coupler.
Secure the decorative rod with the hex nut.
Place the check ring over the hex nut
3. Decide the desired hanging height and choose the correct length of rod and chain needed.
4. Feed the wire through the rod (the long or short) and screw the rod onto the top of the decorative rod and secure it with the loop.
5. Raise the fixture up to the ceiling and do the wire connection.
Attach the canopy over the mounting bar and secure it with the collar ring.
6. Screw the threaded nipple into the harp on the bottom of the fixture body.
Slide the short tube and bottom spoke over it and secure with the hex nut.
Place the small check ring over the hex nut and secure it with the finial.
7. Starting from the bottom, hang the glass onto the fixture frame.

Crystal Sets

A. 12 Sets (1)14.5" Glass

B. 12 Sets (1)6.5" Glass

WARNING: This product can expose you to Lead, which is known to the State of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.p65warnings.ca.gov


CRYSTORAMA

LIGHTING THE WAY FOR SIXTY YEARS



Crystorama.com

ASSEMBLY INSTRUCTION MODEL #ACK-921-AG

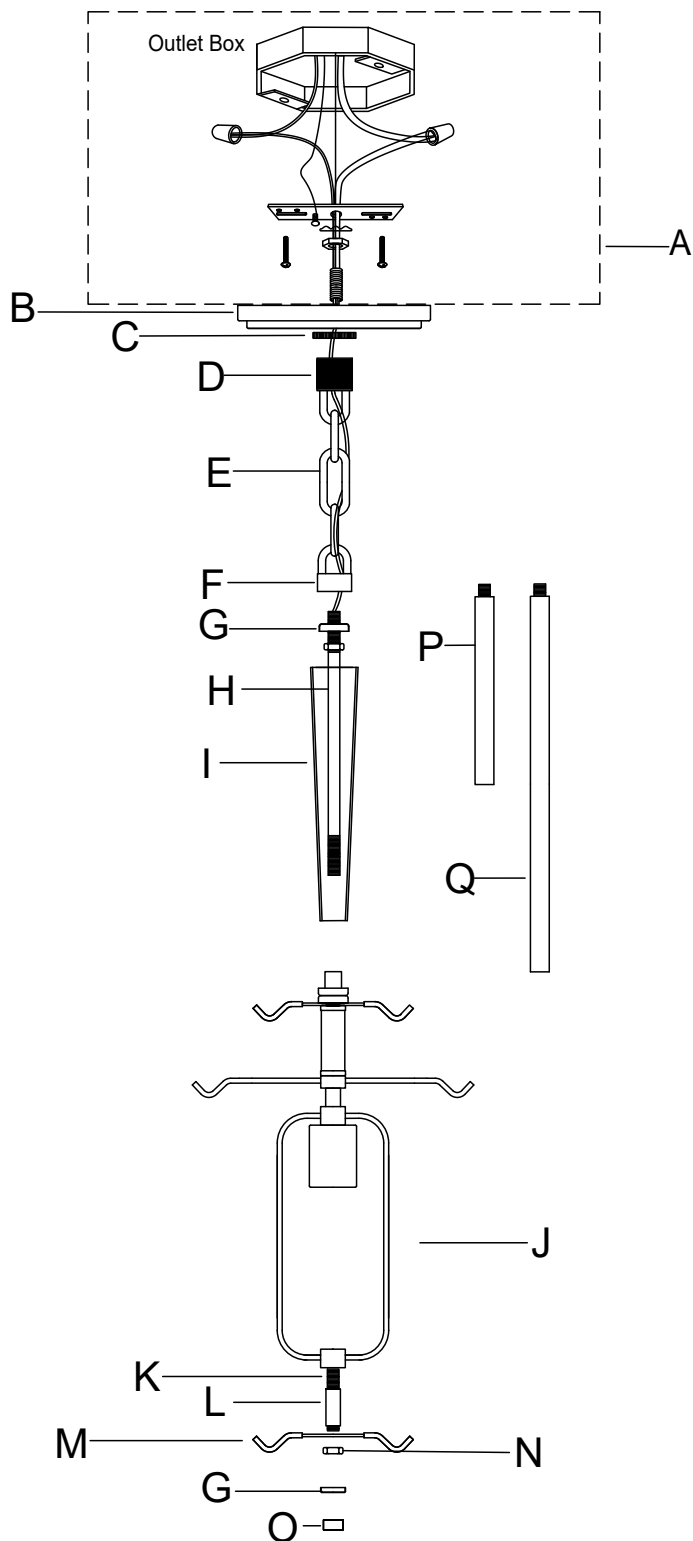

Part Number

Part Numbers

- A.(1)-Mounting hardware
 - Wire Connector × 2.
 - Mounting Bar × 1.
 - Mounting Screw × 2.
 - Washer × 1.
 - Nut × 1.
 - Threaded nipple × 1.
- B.(1)-Canopy(W5 1/8" x H3/4")-XSN921AGCAN5IN
- C.(1)-Collar Ring
- D.(1)-Collar Loop
- E.(1)-Chain(4mm×72")-XSN921AGCHA4MM
- F.(1)-Loop
- G.(2)-Small check ring ; Ø5/8"
- H.(1)-Threaded pipe ; H6 3/8"
- I.(1)-Decorative rod ; H6"-XSN921AGDECOROD6IN
- J.(1)-Fixture body kit
 - Coupler ; H3/4"
 - Ø5"Spoke ring with 6 spokes
 - Big check ring ; Ø3/4" x4.
 - Tube ; W3/4"×H2 1/2".
 - Ø9"Spoke ring with 12 spokes
 - Tube ; W1/2"×H5/8"
 - Harp ; W3 3/4"×H8 1/4"
 - Socket.
- K.(1)-Threaded nipple ; H2"
- L.(1)-Short Tube; W1/2"; H1 1/8"
- M.(1)-Bottom spoke
- N.(1)-Hex nut ; W5/8"
- O.(1)-Finial
- P.(1)-Short Rod ; H6"-XSN921AGROD6IN
- Q.(1)-Long Rod ; H12"-XSN921AGROD12IN