


CRYSTORAMA LIGHTING



ASSEMBLY INSTRUCTION MODEL #EMO-5409-MG

Refer to the safety cable mounting on the next page!




All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.



You will need 22- Candelabra Base Bulb
40 Watts Recommended 60 Watts Max.

USE LED BULBS FOR EXTENDED USE

This fixture is Damp rated

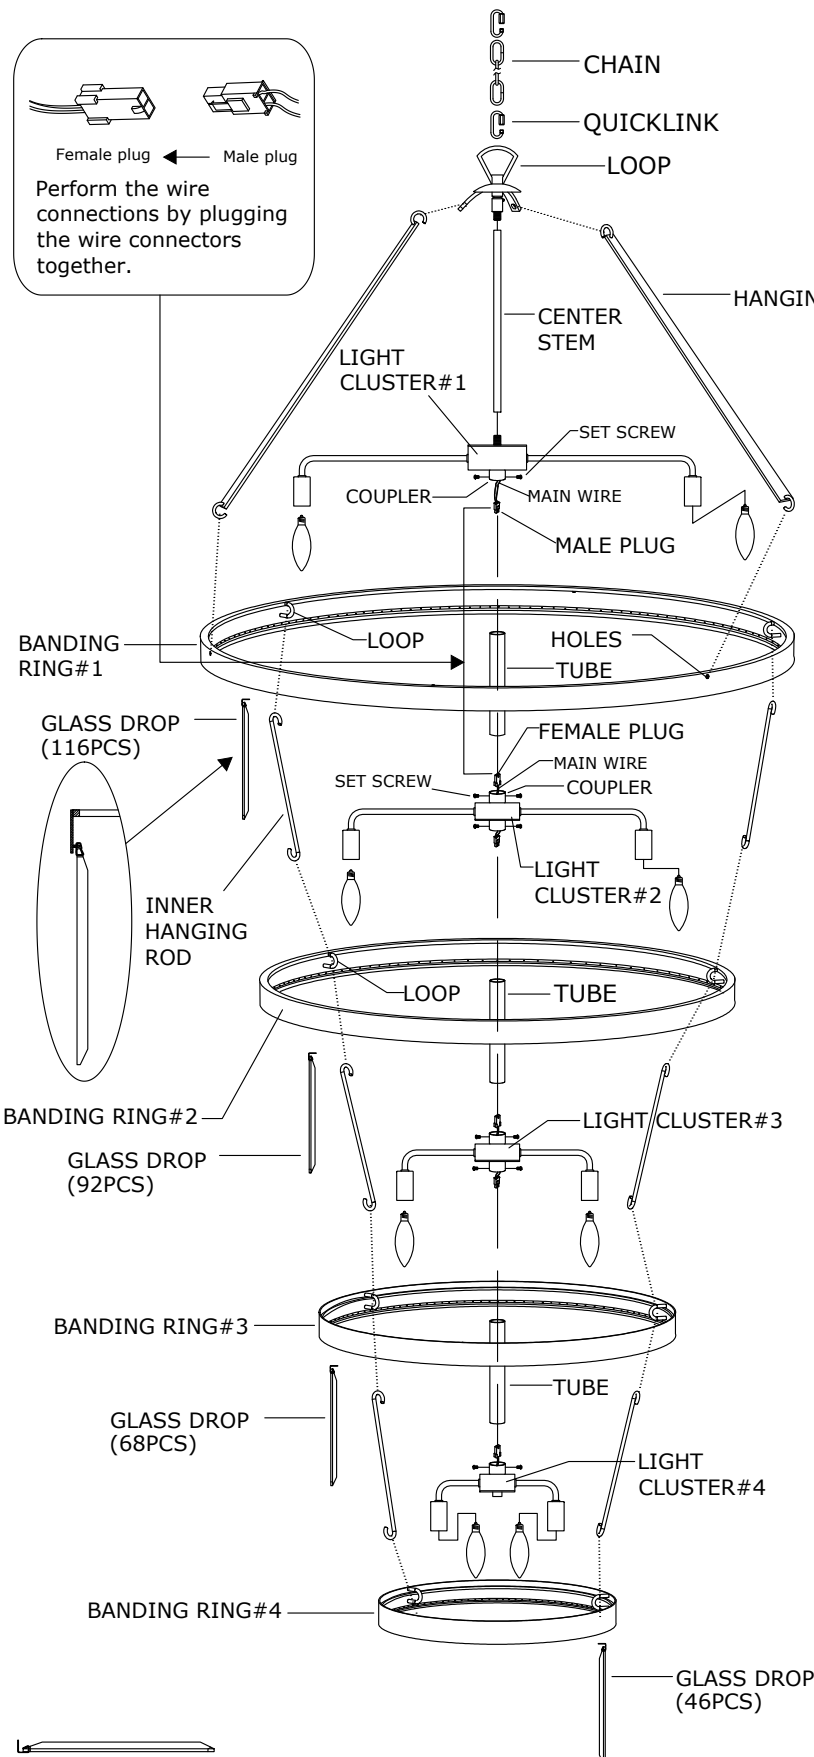

Glass drop(W1" x L7.875") x 322sets

HOW TO INSTALL:

Place the fixture parts on a soft cloth-covered platform before installation of fixture.

1. Slip the center stem along the wire and thread it onto the nipple located on the top of light cluster#1.
2. Slip the loop assembly along the wire and thread it into the center stem.
3. Slip one of the tubes over the coupler on the bottom of light cluster#1 and align the holes on the tube with the holes on the coupler. Secure it with the set screw.
4. Connect the fixture wire from light cluster #1 to the wire from light cluster#2 by connecting the male plug to the female plug. Raise light cluster#2 to allow the coupler on top of it to slip into the tube and align the holes on the coupler with the holes on the tube. Secure it with the set screw.
5. Repeat Steps 3 and 4 to assemble light clusters #3 and #4.
6. Connect one end of the hanging rod to the hole on banding ring#1. Connect the other end to the loop assembly.
7. Connect one end of the inner hanging rod to the loop on banding ring#1. Connect the other end to the loops on banding ring#2.
8. Repeat Step 7 to assemble banding rings#3 and #4.
9. Install the bulbs (not included) into the sockets.
10. Hang the glass drops to the banding rings.

WARNING: This product can expose you to Lead, which is known to the State of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.p65warnings.ca.gov

CRYSTORAMA LIGHTING




ASSEMBLY INSTRUCTION MODEL #EMO-5409-MG

Part Number

For 50lbs rated outlet box

- (1)-Long threaded rod
- (1)-Hickey
- (1)-Short threaded pip
- (3)-Metal washer
- (7)-Hex nut

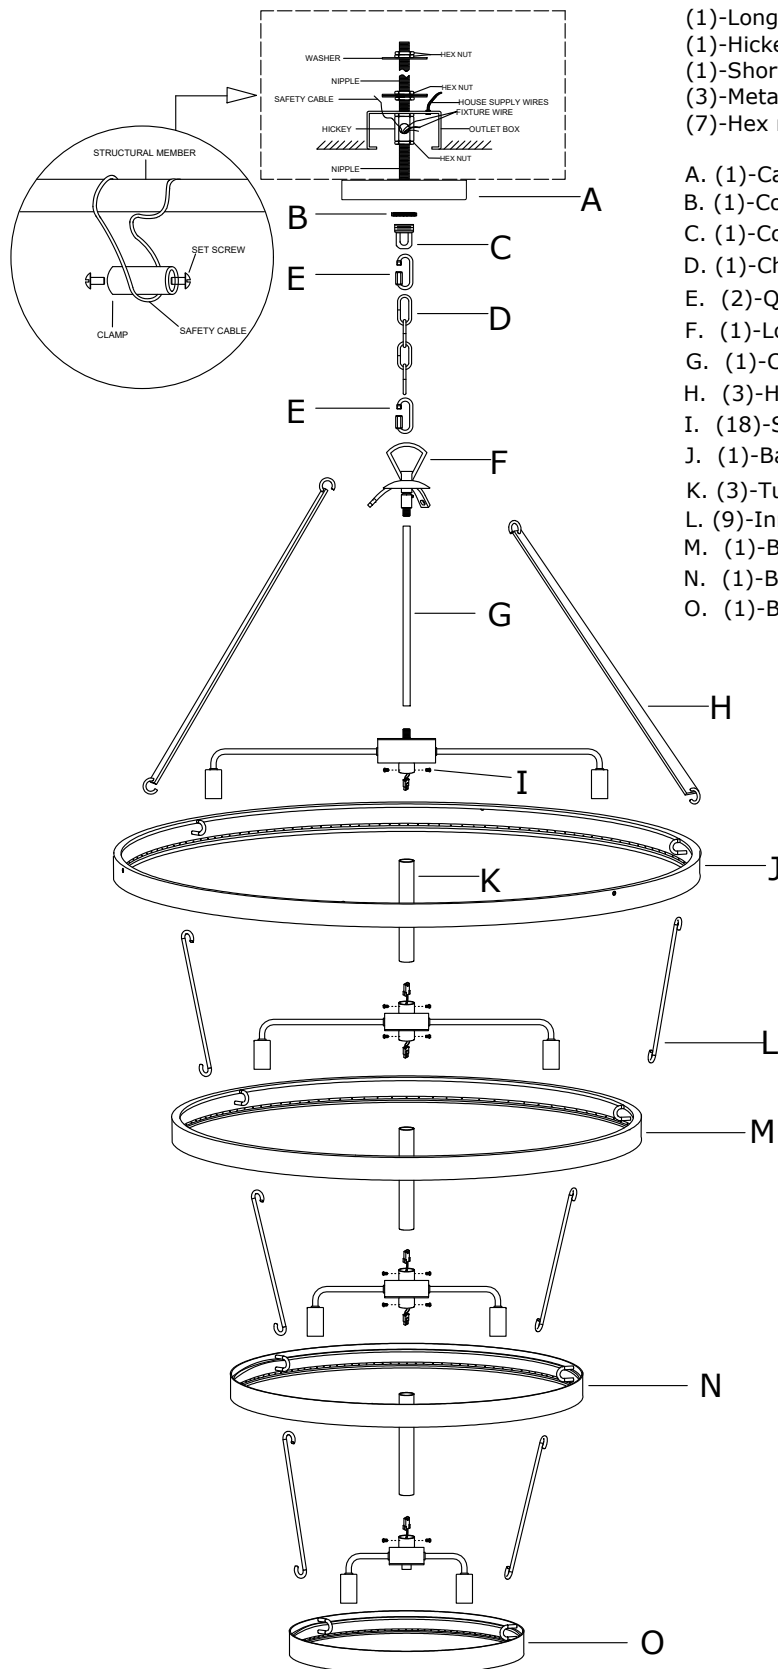


- A. (1)-Canopy (W5"x H1")-XSN5409MGCAN5IN
- B. (1)-Collar ring
- C. (1)-Collar loop-XSN5409MGLOOP
- D. (1)-Chain (5.0mm x L72")-XSN5409MGCHA5MM
- E. (2)-Quick link
- F. (1)-Loop assembly-XSN5409MGLOOP
- G. (1)-Center stem ; W0.625"; L16.5"-XSN5409MGSTEM16.5IN
- H. (3)-Hanging rod ; W1.125"; L25.125"-XSN5409MGROD25IN
- I. (18)-Set screw
- J. (1)-Banding ring#1 ; W40"; H1.625"-XSN5409MGRING1
- K. (3)-Tube ; W1"; L6.875"
- L. (9)-Inner hanging rod-XSN5409MGINROD9IN
- M. (1)-Banding ring#2 ; W32"; H1.625"-XSN5409MGRING2
- N. (1)-Banding ring#3 ; W24"; H1.625"-XSN5409MGRING3
- O. (1)-Banding ring#4 ; W16"; H1.625"-XSN5409MGRING4


CRYSTORAMA LIGHTING



ASSEMBLY INSTRUCTION MODEL #EMO-5409-MG

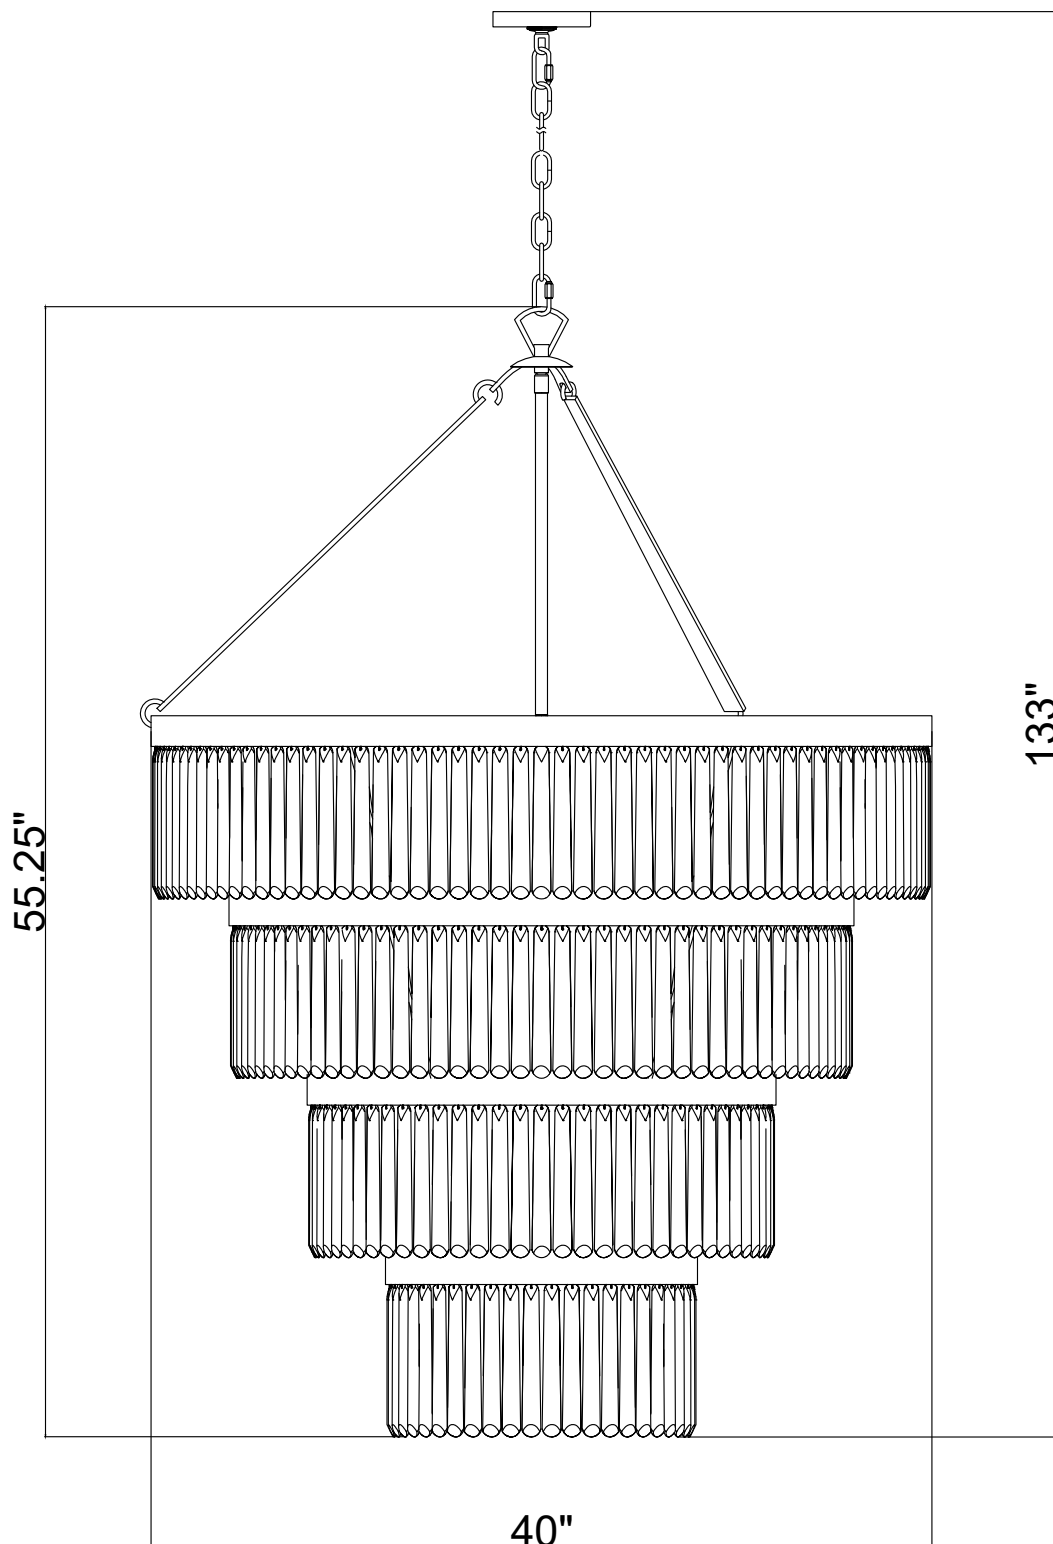

SAFETY CABLE INSTALLATION INSTRUCTIONS

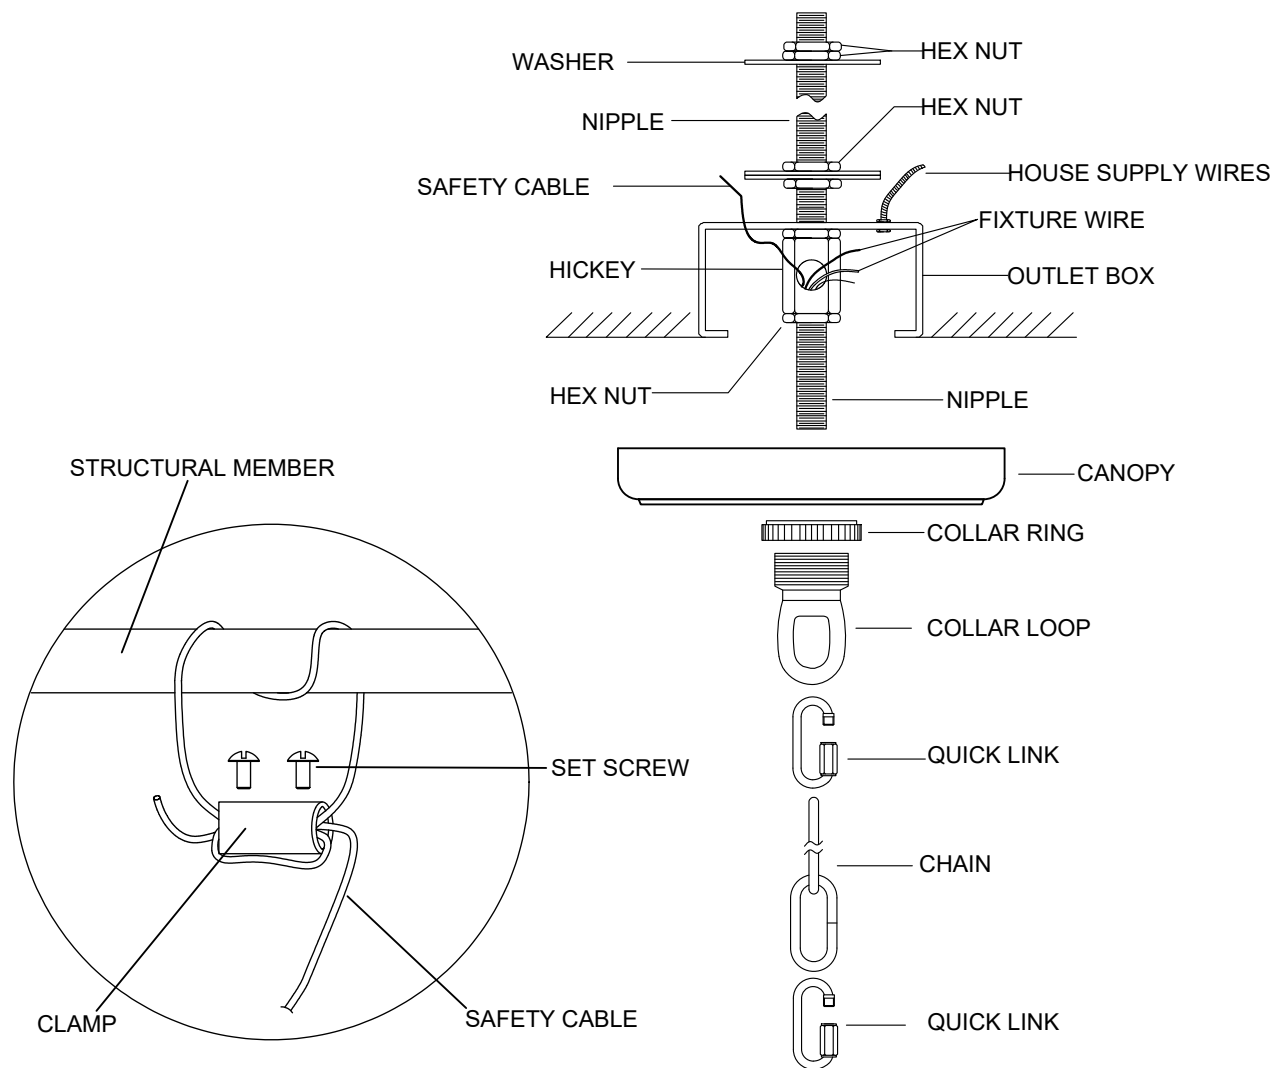

IMPORTANT:

FOR A SAFE AND SECURE INSTALLATION, THESE FIXTURES MUST BE INSTALLED BY MEANS OF SUPPORTS THAT ARE INDEPENDENT OF THE OUTLET BOX.

SUGGESTED INSTALLATION:

1. Provide a 1/4 IPS pipe with one end securely mounted to a beam or a structural member. The other end should protrude through the center of the outlet, as shown.
2. Assemble the screw collar loop, nipple, hex nuts and hickey to center 1/4 IPS support pipe and adjust overall length to allow the collar ring to hold the canopy flush to the ceiling. When the adjustments have been completed secure the hex nut, as shown.
3. Use one quick link to connect fixture loop and the bottom of chain. Slide the screw collar ring over the upper end of the chain, through the (Finished side down). Then use another quick link to connect the collar loop and the top of chain.
4. Lace the fixture wires, ground wires and safety cable through the chain and screw collar loop, exiting through the side of HICKEY. Proceed to attach the FIXTURE GROUND WIRE to the HOUSE GROUND WIRE using wire connector. Using wire connectors, connect the HOUSE WHITE WIRE to the FIXTURE SUPPLY WIRE (WHITE OR RIBBED SIDE) ; connect the HOUSE BLACK (or RED) WIRE to the FIXTURE SUPPLY WIRE (BLACK or SMOOTH SIDE). Wrap all connectors with approved electrical tape. Wrap safety cable around outlet box brace and pull cable taut. Secure cable with the clamp and (2) set screws provided, as shown.
5. Push the CANOPY upward over the OUTLET BOX. Be sure that all wires are carefully tucked into the OUTLET BOX cavity. Secure canopy against ceiling by threading CANOPY LOCK RING onto the CANOPY LOOP. Tighten until snug.