

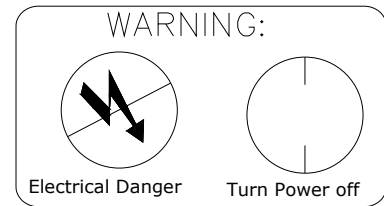


ASSEMBLY INSTRUCTION MODEL #HRK-2500-LG-NY

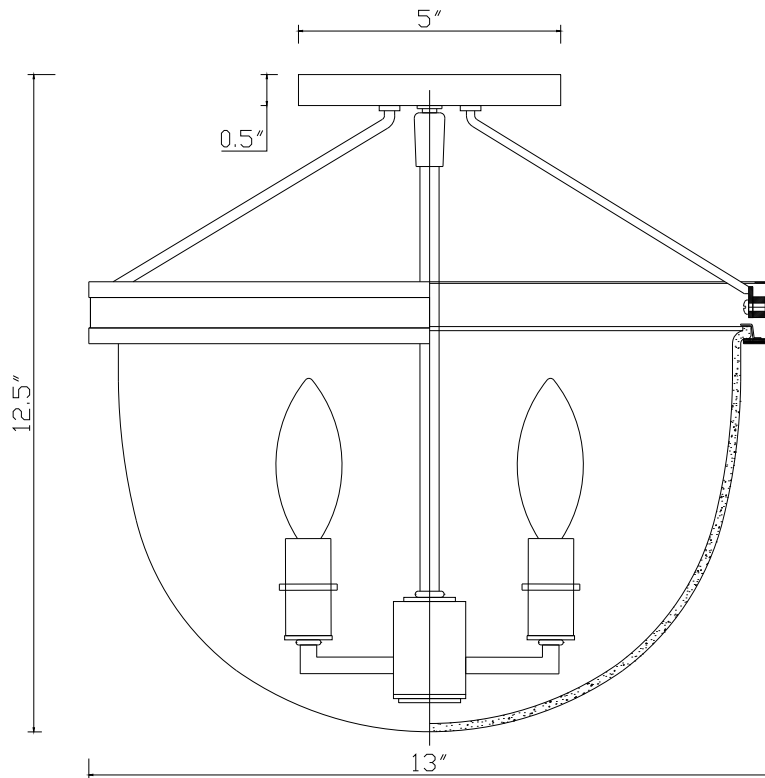

All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.



You will need 4- Cand. base Bulb
40 Watts Recommended 60 Watts Max
USE LED BULBS FOR EXTENDED USE

THIS FIXTURE IS DAMP RATED

How to Install

Please place all the parts on a soft cloth covered table top during the installation of the fixture.

1. Remove the screws on the side of the canopy to loosen the mounting bracket. Install the mounting bracket to the outlet box.
2. Using the provided wrench from the parts bag, remove the screws from the nuts inside the banding ring. Slide the glass shade over the banding (the larger opening of the band should face upwards) and rest it on the lower rim of the banding ring. Secure the glass in place using the clips. Make sure the glass is level and three nuts are exposed beyond the glass edge.
3. Align the hole on the tab at the end of a hang rod with the hole on the nut, then secure it using the screw. Repeat this step for the remaining rods.
4. While one person supports the glass, remove the hex nuts from the opposite ends of the hang rods and insert the rod ends into the holes on the canopy. Secure them using the hex nuts. Handle with care to avoid scratching the paint finish.
5. Install the bulbs (not included).
6. Raise the fixture up to the ceiling and do the wire connection. Secure the canopy with side screws.

ASSEMBLY INSTRUCTION MODEL #HRK-2500-LG-NY

Part Number

Part Numbers

- A. (1)-Mounting hardware
- B. (1)-Canopy (XAR2500LGCAN5IN)
- C. (3)-hex nuts
- D. (3)-hang rods (XAR2500LGROD7IN)
- E. (1)-wrench
- F. (1)-Band ring
- G. (2)- screw
- H. (1)-Glass Shade (XAR2500GLA12.25IN)
- I. (4)-Candle Sleeves (XAR2500LGNYCDL2IN)
- J. (1)-Center stem kit

