



ASSEMBLY INSTRUCTION MODEL #HRK-2501-LG-NY

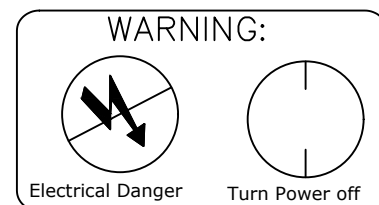

All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.

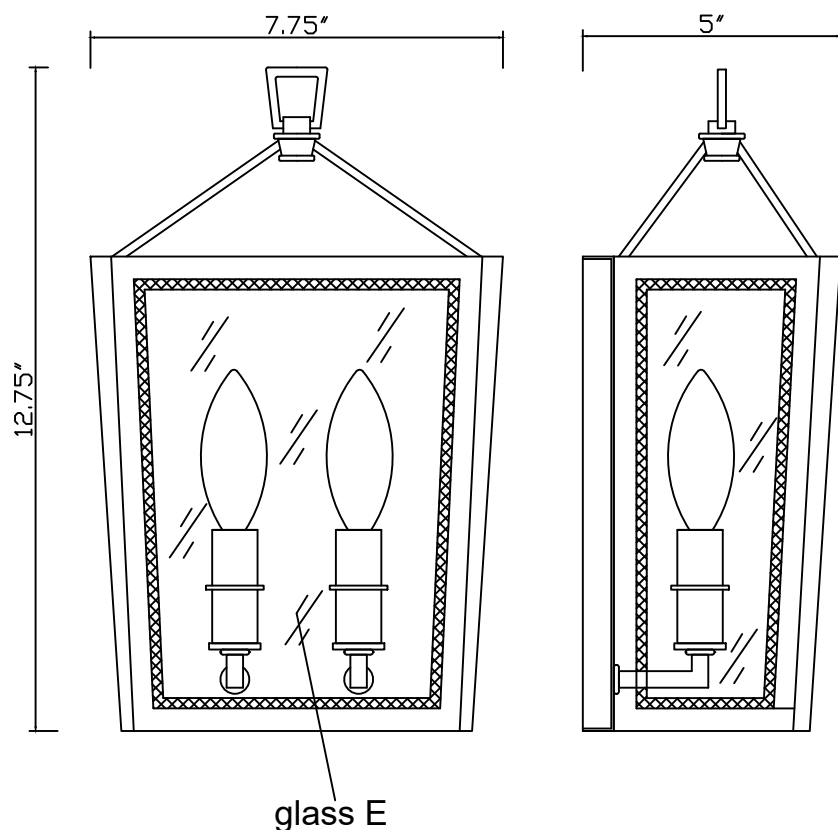


You will need 2- Cand. base Bulb
40 Watts Recommended 60 Watts Max
USE LED BULBS FOR EXTENDED USE

THIS FIXTURE IS DAMP RATED

How to Install

1. Loosen the mounting plate from the frame and place it over the outlet box . Mark four points on the wall surface at the center of the holes in the mounting plate.
2. Drill the holes at the marked points on the wall and insert the plastic anchors. Install the mounting plate onto the outlet box using the anchor screws.
3. Install the frame onto the mounting plate and secure with screws.
4. Install the bulbs(not included).
5. Install the larger glass into the front of the frame and the smaller glasses into both sides of the frame.

ASSEMBLY INSTRUCTION MODEL #HRK-2501-LG-NY

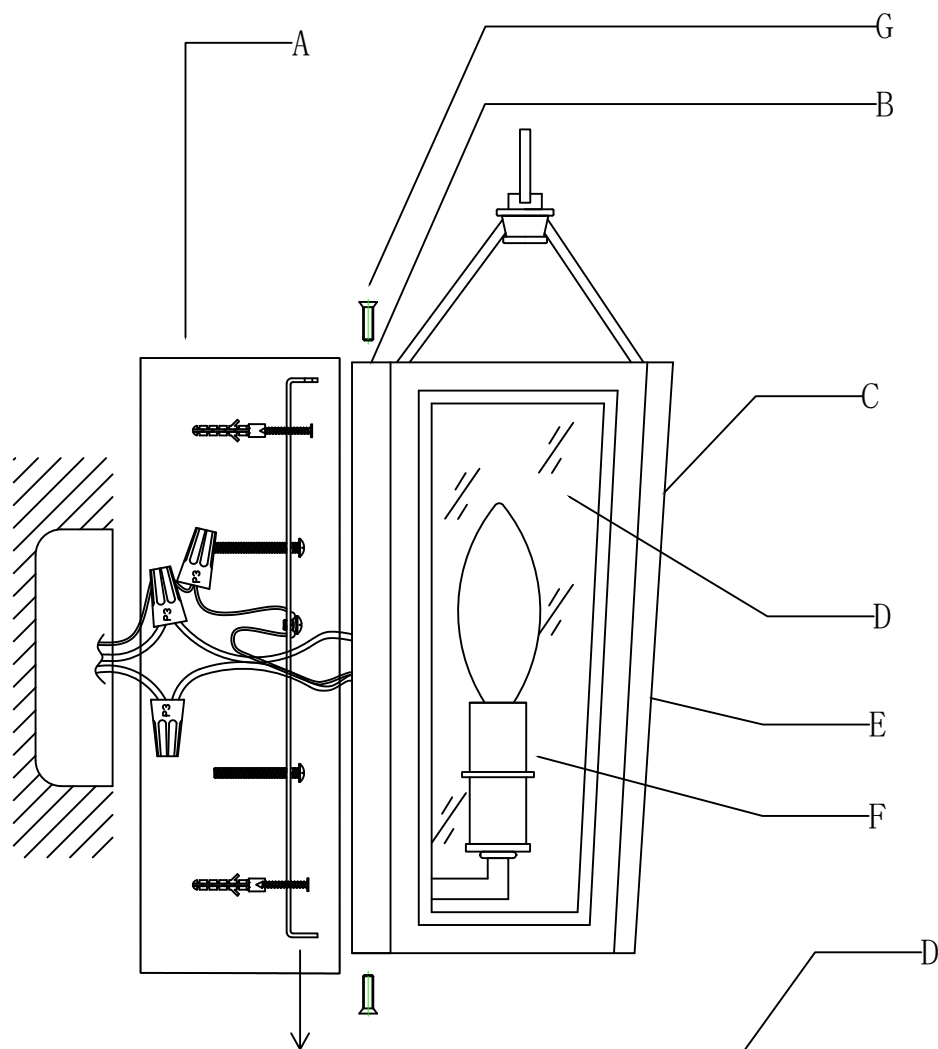

Part Number

Part Numbers

- A. (1)-Mounting hardware
- B. (1)-Back plate
XAR2501LGNYBKP12.75IN
- C. (1)-Frame
- D. (2)-Small glass panels
XAR2501GLA3.75IN
- E. (1)-Large glass panel
XAR2501GLA7IN
- F. (2)-Candle Sleeves
XAR2500LGNYCDL2IN
- G. (4) -Screws

