CRYSTORAMA

LIGHTING THE WAY FOR SIXTY YEARS

crystorama.com

ASSEMBLY INSTRUCTION MODEL #MOR-8801-AG

For Hard-wired

5"

7"

For Plug-in

15"~max24"

11.6"

2.5"

29"
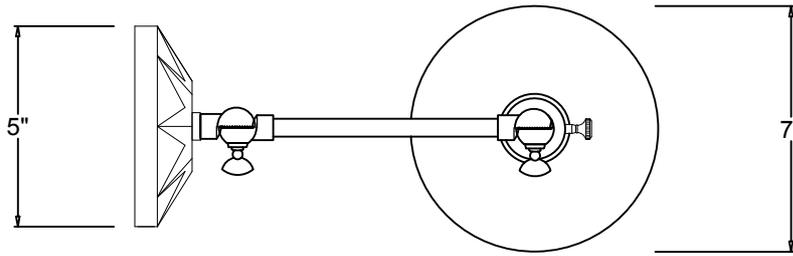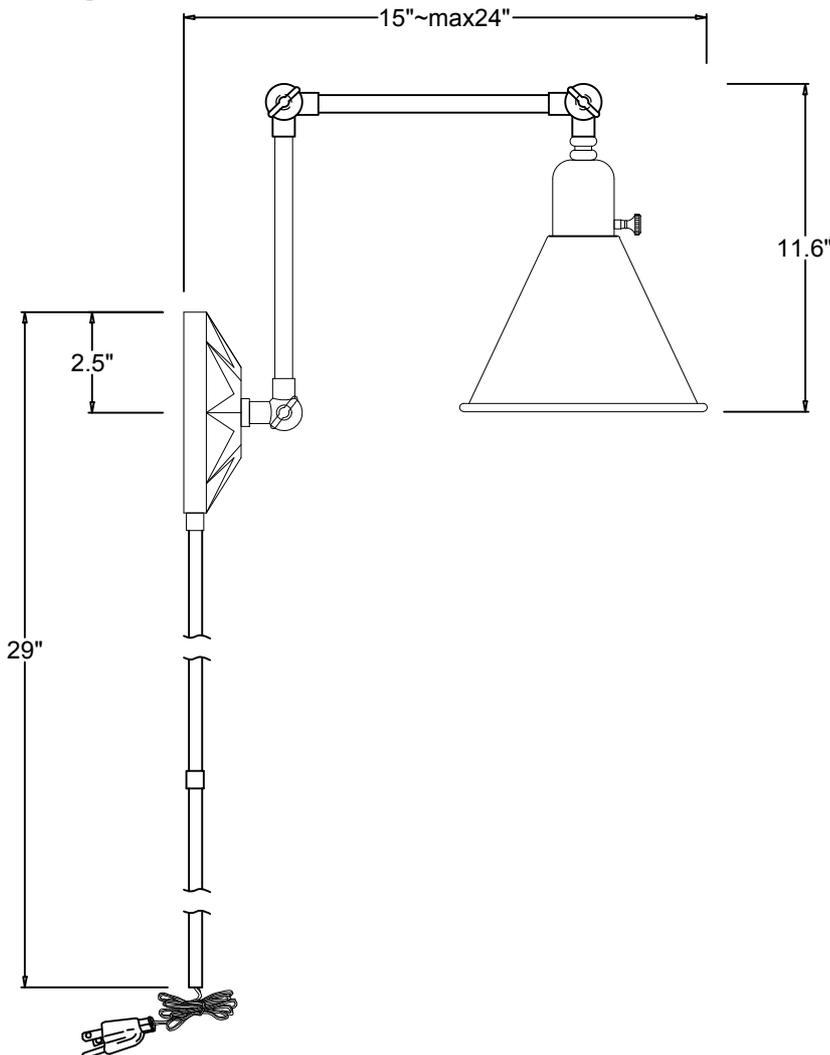
WARNING

Electrical Danger   Turn Power Off

All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.

c UL ®

You will need 1-Medium Bulb
40 Watts Recommended 60 Watts Max
Bulb not included
USE LED BULBS FOR EXTENDED USE
This fixture is DRY rated

How to Install

This is a convertible piece. Installation steps for both Hard-Wire and Plug-In options are below
For Hard-wired installation, please proceed as follows:
1. Remove the plug wires from the fixture wires.
2. Remove the Nut (K) from the bottom of Backplate (B) and cover the hole with plug (J).
3. Attach the mounting plate onto the outlet box using two outlet box screws.
4. Attach the Backplate onto the mounting plate. Secure with side screws.
5. Attach the Shade (G) onto Socket (E) and secure it using the Socket Ring (H).

For Plug-in installation, please proceed as follows:
1. Connect Rod (I) to the bottom of Backplate (B).
2. Determine the desired location you'd like to put this fixture on the wall, and mark two points on it with same distance as between the holes on the Mounting Plate .
3. Drill the holes at the marked points and insert the anchors into the holes, Attach the mounting plate onto the wall by anchor screws.
4. Attach the Backplate (B) onto mounting plate.
5. Attach the Shade (G) onto Socket (E) and secure it using the Socket Ring (H).

⚠ WARNING: This product can expose you to Lead, which is known to the State of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.P65Warnings.ca.gov

Part Number

Part Numbers

A.Mounting Hardware
 (2)Wire Nut
 (1)Mounting Plate
 (3)Mounting Screws
 (3)Anchors
 (2)Anchor Screws

B.(1)Backplate;Ø5"x1.6"h;XMO8800AGBKP5IN

C.(2)Locking Device;XMO8800AGLOCKD

D.(1)Swing Arm

E.(1)Socket

F.(1)Switch

G.(1)Metal Shade;Ø7"x5";XMO8800AGSHA5IN

H.(1)Socket Ring

I.(2)Rod;Ø0.5"x12"h;XMO8800AGROD12IN

J.(1)Plug

K.(2)Nut

L.(3)Screw