


CRYSTORAMA

LIGHTING THE WAY FOR SIXTY YEARS



ASSEMBLY INSTRUCTION MODEL #SEV-1800-AG

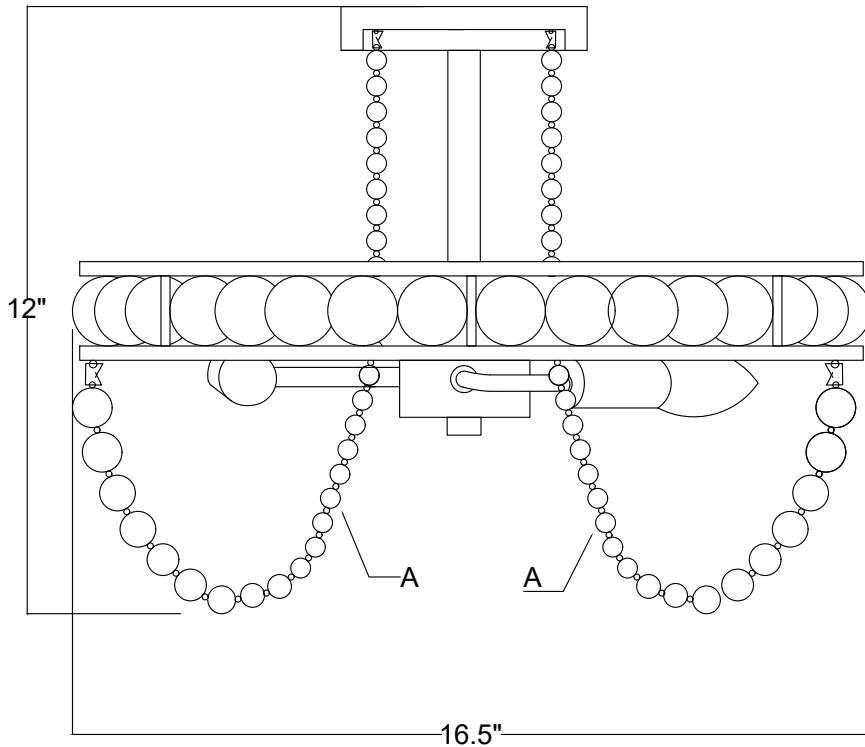

WARNING:




Electrical Danger



Turn Power Off

All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes



You will need 3- Candelabra Base Bulb
40 Watts recommended 60 Watts Max.

USE LED BULBS FOR EXTENDED USE

The fixture is Damp rated

HOW TO INSTALL:

Place the fixture parts on a soft cloth-covered platform before installation of fixture.

Note: Please do not remove plastic wrap around the rod until all the crystal strands are dressed.

1. Feed the wire through the threaded pipe then screw the threaded pipe into the coupling on the lamp body. Secure with the hex nut. Place the rod and check ring over the threaded pipe. Secure with the threaded collar kit.
2. Place the canopy and collar ring over the rod. And secure with the threaded collar kit. Take a bead strand and hang the end with the small bead onto the canopy using the holes on the canopy. Repeat for all bead strands. Do not hang the other end onto the frame until step #4.
3. Raise the fixture up and attach the mounting bar onto the outlet box. After the wire connection is made, place the canopy over the mounting bar and secure with the collar ring.
4. Hang the other end of the bead strand onto the frame.

Crystal Sets

- A. 24 Sets (2)22mm Ball + (2)20mm Ball + (2)18mm Ball + (1)16mm Ball + (2)14mm Ball + (13)12mm Ball.

 **WARNING:** This product can expose you to Lead, which is known to the State of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.p65warnings.ca.gov

CRYSTORAMA

LIGHTING THE WAY FOR SIXTY YEARS



Crystorama.com

ASSEMBLY INSTRUCTION MODEL #SEV-1800-AG

Part Number

Part Numbers

A.(1)-Mounting hardware
Wire Connector × 2.
Mounting bar × 1.
Mounting Screw × 2.

B.(1)-Canopy(W5"xH7/8")with 24 holes on bottom
-XSN1800AGCAN5IN

C.(1)-Threaded Collar kit

D.(1)-Collar ring

E.(2)-Check ring

F.(1)-Rod ; H4 3/8"-XSN1800AGROD4.375IN

G.(1)-Lamp Body
Coupling
Ø16"Metal frame with 24holes on bottom
Ø30mm Crystal ball
Distributor box
Socket x3
Finial

H.(1)-Threaded pipe; H4.5"

