


CRYSTORAMA

LIGHTING THE WAY FOR SIXTY YEARS



Crystorama.com

ASSEMBLY INSTRUCTION MODEL #4856-WW

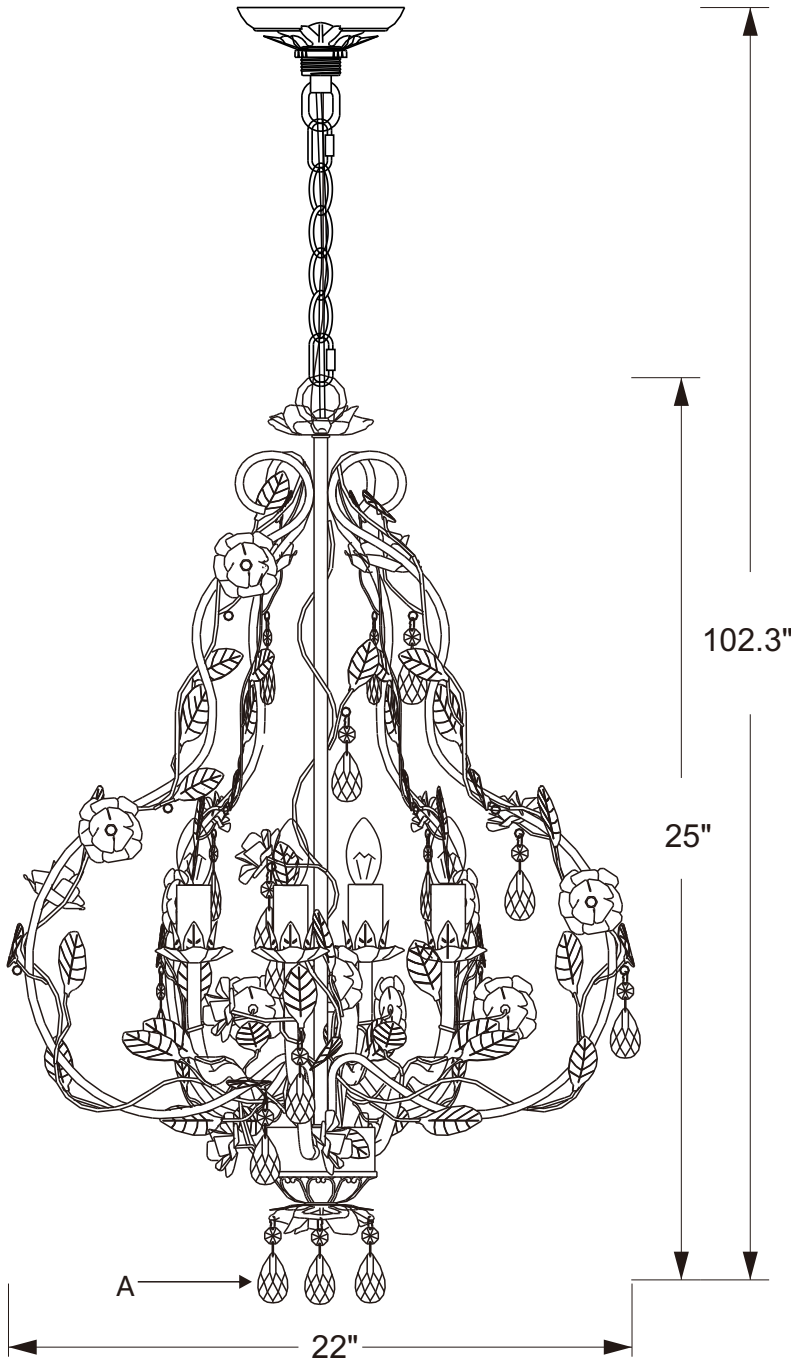

All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.



You will need 5 -Candelabra Base Bulb
40 Watts Recommended 60 Watts Max.
USE LED BULBS FOR EXTENDED USE
This fixture is DAMP rated


How to Install

- 1.Place the candle sleeve onto the socket, and insert recommended bulb (not included).
- 2.Dress the fixture with crystal as illustrated.



NOTICE:
To replace the rose flower(s), remove the ball nuts (see above diagram for reference).

Crystal Sets

CRYSTAL-A=  (1x14mm + 1x38mm crystal) x 36sets

WARNING: This product can expose you to Lead, which is known to the State of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.P65Warnings.ca.gov.

CRYSTORAMA

LIGHTING THE WAY FOR SIXTY YEARS




Crystorama.com

PART NUMBER

MODEL #4856-WW

Part Number

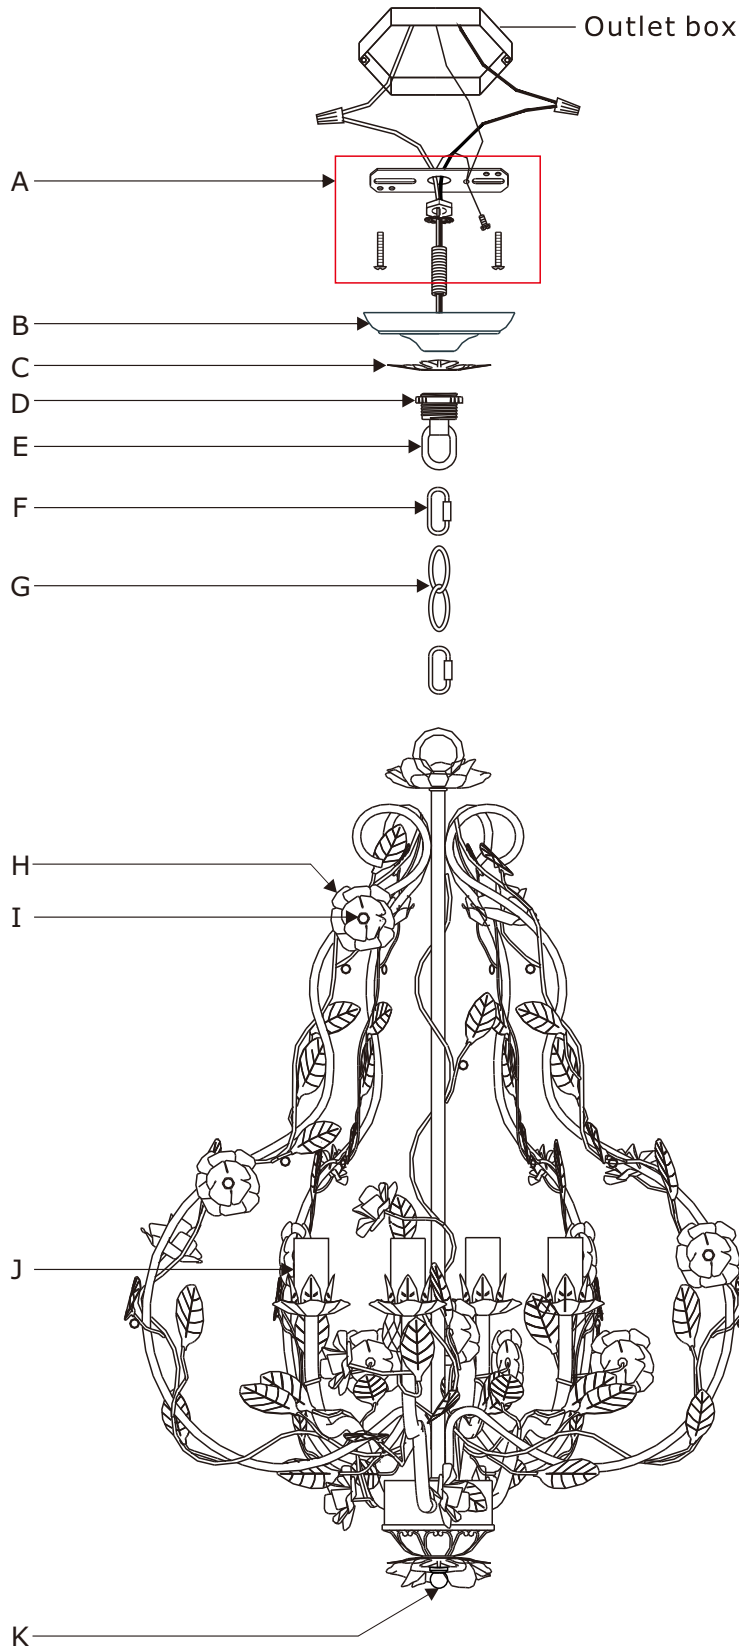

- A. (1) - Mounting Hardware
- B. (1) - Canopy(W5.12",H1.3") #XRE4856WWCAN5.12IN
- C. (1) - Leaf
- D. (1) - Collar Ring
- E. (1) - Collar Loop
- F. (2) - Quick Link
- G. (1) - Hanging Chain(72",4mm) #XRE4856WWCHA4MM
- H. (31) - Rose Flower
- I. (31) - Hex Nut
- J. (5) - Candle Sleeve (W0.86",H2.75") #XRE4856WWCDL2.75IN
- K. (1) - Final #XRE4856WWFIN