





LIGHTING THE WAY FOR SIXTY YEARS

ASSEMBLY INSTRUCTION MODEL #ABB-3003-BK_CEILING

Drawing (1)

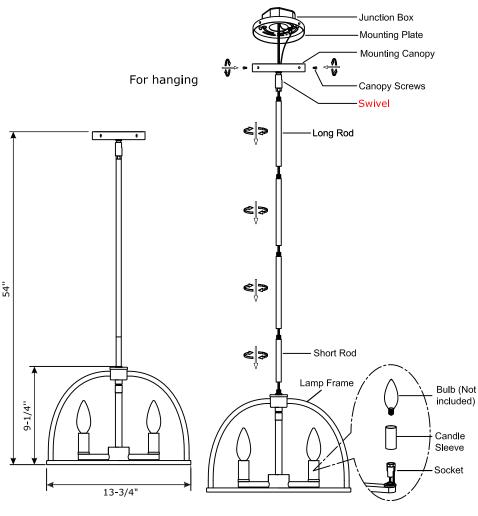


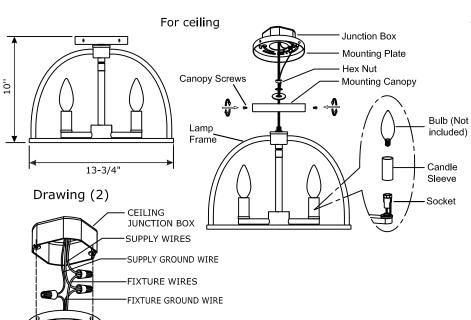

MOUNTING PLATE

GROUND SCREW

MACHINE SCREW



All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.





You will need 3-Candelabra 40 Watts Recommended 60 Watts Max. USE LED BULBS FOR EXTENDED USE

THIS FIXTURE IS DRY RATED

How to install for hanging:

Please place the fixture frame on a soft cloth covered table before the installation.


- 1. Determine the desired hanging height and choose the correct length of rod.
- Feed the fixture wires through the rods and canopy. Afterwards, connect the rods together then screw the swivel onto the top of the upper-most rod.
- 3. The canopy of the fixture can now be mounted to the ceiling by following instruction **Drawing 2**.
- 4. Place the Candle Sleeve over the Socket, then Install the Bulb to the Socket.

How to install for ceiling:

Please place the fixture frame on a soft cloth covered table before the installation.

- 1. Remove the swivel from the canopy.
- 2. Put the canopy over the top of the frame and secure with hex nut.
- The canopy of the fixture can now be mounted to the ceiling by following instruction **Drawing 2**.
- Choose either the white or gold candle sleeves and place it over the socket. Install the Bulb into the socket.

WARNING: This product can expose you to Lead which is known to the state of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.P65Warnings.ca.gov





ASSEMBLY INSTRUCTION MODEL #ABB-3003-BK_CEILING

Junction Box - Dx 3

Part Number

Part Numbers

- A. (1)-Mounting hardware
- B. (1)-Canopy W5"x H0.75" (XFW3003BKCAN5IN)
- C. (3)-Canopy Screw W0.16"x H0.48"
- D. (3)-Long Rod W1/2"x H12" (XFW3003BKROD12IN)
- E. (1)-Short Rod W1/2"x H6" (XFW3003BKROD6IN)
- F. (1)-Lamp Body
- G. (3)-Bulb (Not included)
- H. (3)-White Metal Candlesleeve W1"x H2" (XFW3003WHCDL2IN)
 - (3)-Gold Metal Candlesleeve W1"x H2" (XFW3003VGCDL2IN)