




CRYSTORAMA LIGHTING

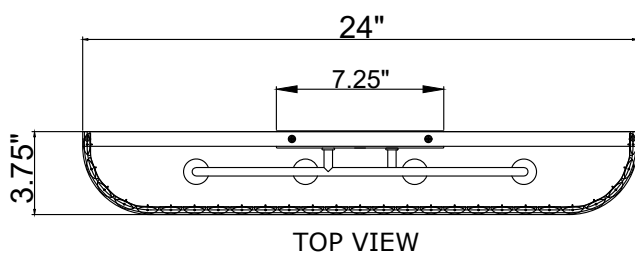

ASSEMBLY INSTRUCTION MODEL #EMO-5403-MG

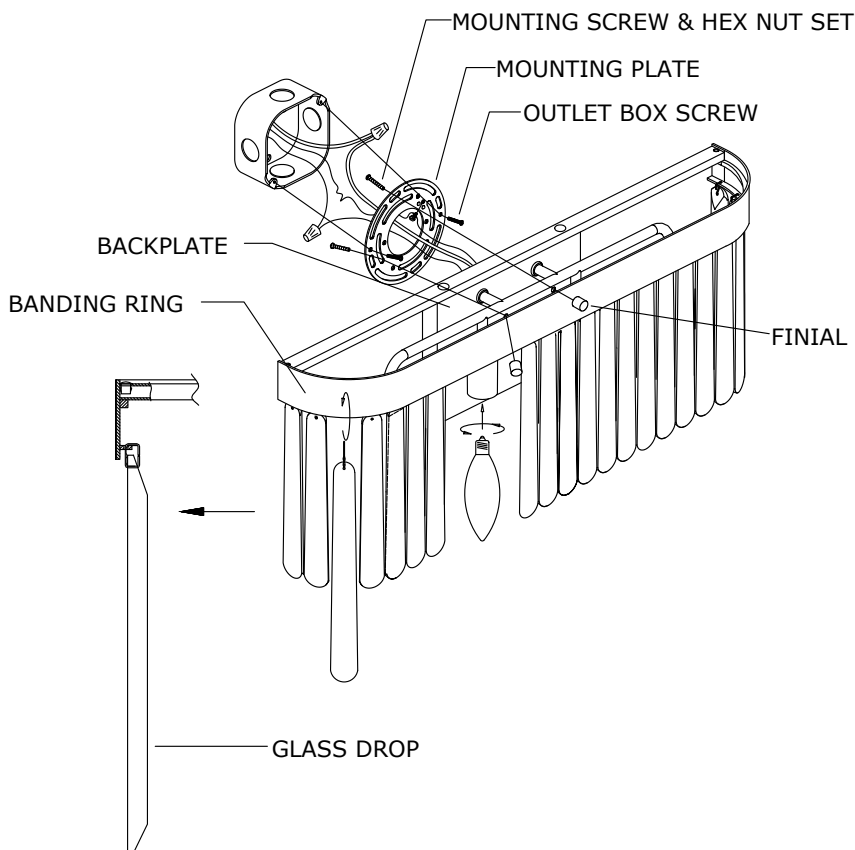

TOP VIEW

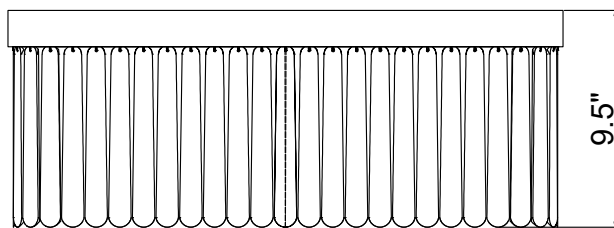

FRONT VIEW

WARNING:




Electrical Danger



Turn Power Off

All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.



You will need 4- Candelabra Base Bulb
40 Watts Recommended 60 Watts Max.
USE LED BULBS FOR EXTENDED USE

This fixture is Damp rated.

HOW TO INSTALL:

Place the fixture parts on a soft cloth-covered platform before installation of fixture.

1. Thread the mounting screws into the matching holes in the mounting plate. Secure the mounting plate to the outlet box with the outlet box screws.
2. Install the backplate onto the mounting plate and secure it with the finials.
3. Install the bulbs(not included) into the sockets.
4. Hang glass drop to the banding ring.



Glass drop (W1"xL7.875") x 27sets

WARNING: This product can expose you to Lead, which is known to the State of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.p65warnings.ca.gov

CRYSTORAMA LIGHTING



ASSEMBLY INSTRUCTION MODEL #EMO-5403-MG

Part Number

- A.(1)-Mounting hardware
 - Wire connector ×2
 - Mounting plate x1
 - Mounting screw & Hex nut set ×2
 - Outlet box screw ×2
- B. (1)-Backplate ; L7.25"x W5"x H0.75"
-XSN5403MGBKP7.25IN
- C. (1)-Banding ring-XSN5403MGRING
- D. (2)-Finial
- E. (4)-Socket

